COMMERCIAL DATA SHEET Alpine 125 XT



Billi Alpine125 with XT Touch Dispenser

Enjoy refreshing chilled or a continuous supply of ambient temperature filtered water.

Billi's Alpine 125 offers a premium filtered drinking water experience to account for all preferences.

The XT touch dispenser is an innovative, contemporary design, which has a touch sensitive panel offering a sophisticated and clean style.





STILL

LL CHILLED



XT Touch Dispenser

Alpine Under-Bench Unit















SPACE SAVING DESIGN

ENERGY EFFICIENT

NO CUPBOARD VENTILATION REQUIRED

UNLIMITED FILTERED WATER

ADJUSTABLE CHILLED TEMPERATURE











COOLED TECHNOLOGY

RANGE OF FINISHES

EASY INSTALLATION

AUSTRALIAN DESIGNED & MADE

HACCP CERTIFIED

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	Chilled water delivery (cups per hour)	Still water delivery (cups per hour)	Power supply (amps)
STILL CHILLED	932125T	Alpine 125	XT Touch	Up to 40	120	unlimited	10

Accessories

992800 - 70mm Riser & Font

992820 - 70mm Riser













990720 - Tubing Extension Kit for X series dual temp dispensers 2mtrs

Finishes

CH - Chrome

Standard Finishes

BR-Brushed

MB - Matte Black

MW - Matte White


Special Order Finish

RG - Rose Gold

Add the Finish code to the Product Code to finalise your specification, eg. 932125TCH

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

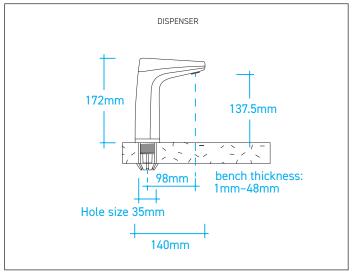



WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.


POWER SUPPLY

A standard 10 amp power outlet is required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

PREFERRED INSTALLATION LAYOUT

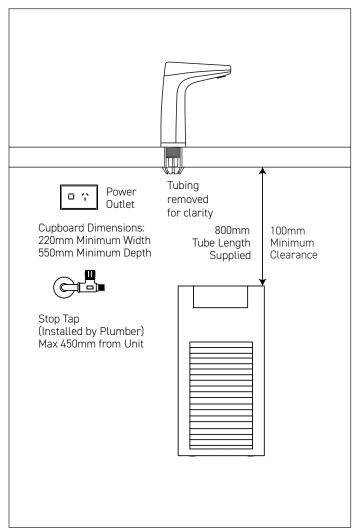

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021882;HACCP: PE-872-WAT-1-02; ISO 9001:2015, QEC 11627; Tested to ATS5200.105 and AS/NZ 4020; Section J6.6 of the BCA; WELL Cornerstone Member.

WARRANTY

The Billi Alpine Range is covered by a comprehensive 2 year warranty on all parts and labour.













Billi Australia Pty Ltd 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



