

COMMERCIAL DATA SHEET

Quadra 460 Firewall



Billi Quadra 460 with Firewall Tower Dispenser

The Quadra 460 Boiling and Chilled drinking water system is a water cooled, high capacity, large population commercial drinking water solution that maintains the core Billi design principles and requires no joinery ventilation. The drawcard for the entire Quadra range is the use of innovative energy reclaim technology which enables space savings, energy efficiency and completely eliminates exhaust heat transfer. All Quadra boiling and chilled products are Global Greentag certified to a Gold standard.

Ideal for patients and residents in health and aged-care environments, the Firewall® Tower Dispenser offers a unique above bench tower design, to guarantee 99.99% pure water, 100% of the time. The system leverages UVC technology uniquely positioned at the point of dispense, rendering waterborne bacteria incapable of reproduction, moments before it is delivered.

The Firewall® Tower Dispenser also features BioCote® technology that protects surfaces against bacteria, mould and fungi. There is no need to specify a carbon free filter to support the bactericidal & virucidal effect of the Firewall Tower dispenser.



BOILING CHILLED



Up to 60



FIREWALL®



Firewall Tower Dispenser



Quadra Under-Bench Unit



Features



SPACE SAVING DESIGN



SAFE TO OPERATE



ENERGY EFFICIENT



WATER COOLED TECHNOLOGY



HEAT EXCHANGE TECHNOLOGY



NO CUPBOARD VENTILATION REQUIRED



AUSTRALIAN DESIGNED & MADE



GREENTAG CERTIFIED



FIREWALL® IS PROVEN COVID-SECURE™
INDEPENDENTLY TESTED

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Suggested number of people	Boiling water delivery (cups per hour)*	Chilled water delivery (cups per hour)	Power supply (amps)
<p>BOILING CHILLED</p>	904060FT	Quadra 460 Firewall Tower Dispenser	Up to 60	180	175	1x10 1x10



* Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all under bench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml.

Accessories


852255 - Firewall Tower front assembly

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

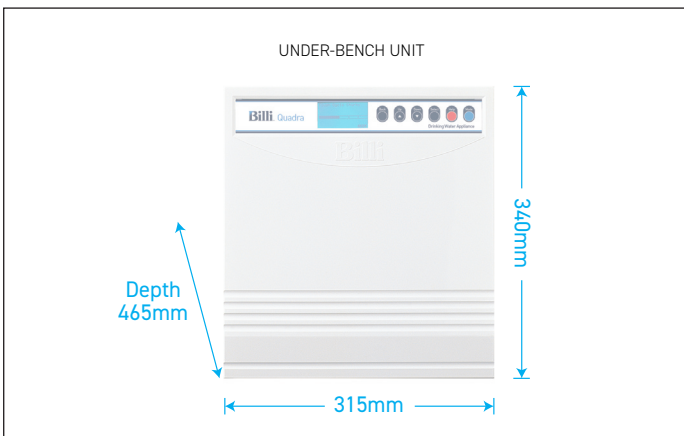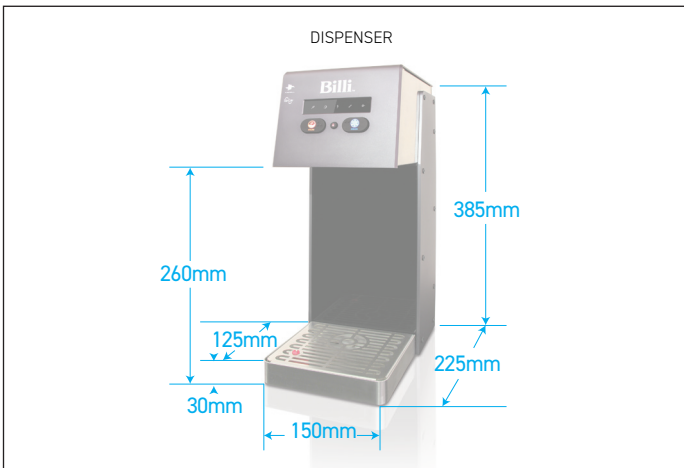

PREFERRED INSTALLATION LAYOUT

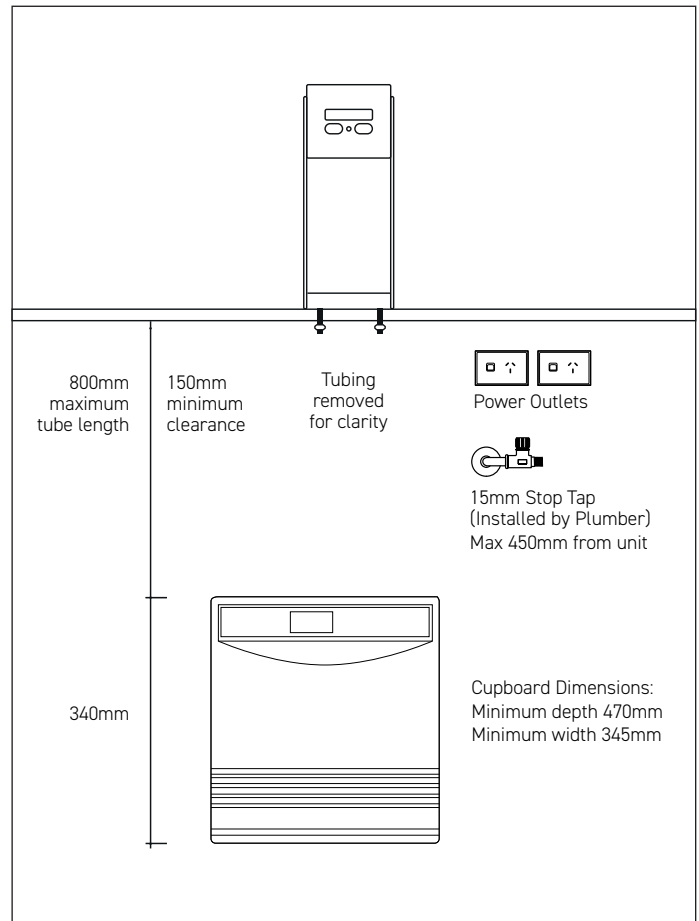

WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

POWER SUPPLY

A standard 10 amp power outlet is required for the underbench PLUS a standard 10 amp power outlet for the Firewall Tower dispenser. Both outlets located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including:

Watermark: WM-021525;
 Certified to AS/NZ3498 and AS/NZ 4020;
 ISO9001:2015, QEC 11627;
 Section J6.6 of the BCA;
 Global GreenTag LCARate Gold;
 HACCP: PE-872-WAT-1-02;
 NSF P231 for Microbiological Purification;
 NSF/ANSI 55 Class A;
 WELL Cornerstone Member.

WARRANTY

The Billi Quadra Range is covered by a comprehensive 2 year warranty on all parts and labour.

Billi™



Billi Australia Pty Ltd
 42 Lucknow Crescent,
 Thomastown, Victoria
 3074 Australia

P 1800 812 321
 F +61 3 9469 0499
 W www.billi.com.au

visit us at



Designed and manufactured in Australia to the highest quality standards