# COMMERCIAL DATA SHEET Alpine Spring 120

### Billi Alpine Spring 120

Ideal for corporate kitchens, cafes, boardrooms, breakouts and hydration stations, this high volume solution offers bottomless still, chilled and sparkling water on tap from a compact underbench system.

The versatile Alpine Spring 120 allows rapid bottle filling to keep your workplace hydrated and productive and is delivered complete with installation kit and font tray accessory.





Triple Cobra Head Dispenser

Alpine Sparkling Under-Bench Unit





## Features







TECHNOLOGY

ENERGY EFFICIENT

ADJUSTABLE CHILLED TEMPERATURE



RAPID BOTTLE FILL





HACCP CERTIFIED

ITALO-AUSTRALIAN PARTNERSHIP


\* Italian design & made Sparkling unit

PRODUCT SPECIFICATIONS						
Water type	Product code	Model name	Dispenser	Suggested no. of people	Capacity (per hour)	Power supply (amps)
STILL CHILLED SPARKLING	842206	Alpine Spring 120 Ltr	Triple Cobra Head	Up to 150	120 litres	10
Accessories						
Still, Chilled & Sparkling Decals (included)		Install Kit (included)	Font tray (included)	Triple Col	ora Head dispense	er (included)
Finishes						
Standard Finish						
CH - Chrome						

Add the Finish code to the Product Code to finalise your specification, eg. 842206CH

# **TECHNICAL DRAWING & INSTALLATION REQUIREMENTS**

### PRODUCT DIMENSIONS

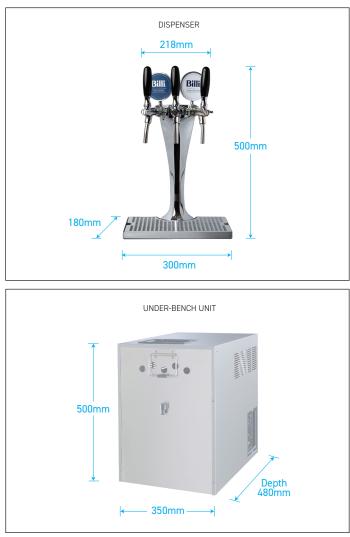

# Ê Ĥ Billi 口 个 Tubing Power removed Outlet for clarity 800mm 100mm Tube Length Minimum Supplied Clearance Stop Tap (Installed by Plumber) Max 600mm from Unit Cupboard Dimensions: P 440mm Minimum Width 485mm Minimum Depth

WATER SUPPLY

A single cold water supply point with a 1/2" BSP stop tap is required. Stop tap is to be installed in an easily accessible position, within 600 mm of the inlet to the boiling water module. Dynamic supply pressure: Min. 250 kPa, max 600kPa. Supply temp min. 5°C, max. 30°C.

#### **POWER SUPPLY**

A single 10 amp GPO is required installed in an accessible position. Refer to Diagram 1. Power circuits must be fitted with an earth leakage protection device (RCD). Chilled water module is supplied with a 1 meter flex cord and plug.

#### CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022607; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; HACCP: PE-872-WAT-2-02; WELL Cornerstone Member.

60mm clearance width each side of underbench module

#### WARRANTY

The Billi Sparkling Suite / Alpine Spring Range is covered by a comprehensive 2 year warranty on all parts and labour.



Billi<sup>™</sup> is a trademark of Billi Australia Pty Ltd. All rights reserved. © Copyright protected. As Billi Australia Pty Ltd has a policy of continual improvement, all details are subject to change without notice. All goods are sold subject to our published terms and conditions. Plumbing licenses: WA PL5415, QLD 1315239, NSW 291743C, SA PGE284004.