# **COMMERCIAL DATA SHEET** Quadra Plus 15 XL & Square



### Billi Quadra Plus 15 with XL Levered Dispenser & Square Mixer

Enjoy all the space saving benefits of Billi's water cooled boiling and chilled Quadra systems PLUS a separate sink mixer to ensure safety and convenience for all users.

Requiring only cold feed mains supply, the Quadra Plus mixes it's own hot water without the need for any additional under-bench space requirements or boosters.

All Quadra Plus boiling & chilled models are Global GreenTag certified to a Gold standard and require no joinery ventilation. Supplied standard with a DDA compliant XL levered drinking water dispenser and 6 star rated square gooseneck mixer tap, the solution is both functional and appealing.





**BOILING** 

CHILLED





XL Levered Dispenser

Square Mixer

Quadra Plus Under-Bench Unit





### **Features**



SPACE SAVING





**ENERGY** 



TECHNOLOGY



WATER TECHNOLOGY



NO CUPBOARD REQUIRED



DESIGNED & MADE



**GREENTAG** 

FASY

### PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	50° hot water capacity litres (initial drawdown)	delivery litres	Boiling water delivery (cups per hour)*	delivery (cups	







904105LS

Quadra Plus 15

XL Levered Up to 100

15

85

250

175

15

Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

**992800 -** 70mm Riser & Font

**992820 -** 70mm Riser

**992803** - 120mm Riser & Font

992830 - 120mm Riser











990714 - Tubing Extension Kit for Plus unit - 1.8mtrs


### **Finishes**



## **TECHNICAL DRAWINGS**


### PRODUCT DIMENSIONS

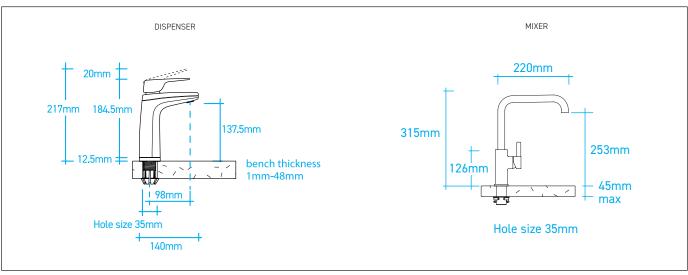

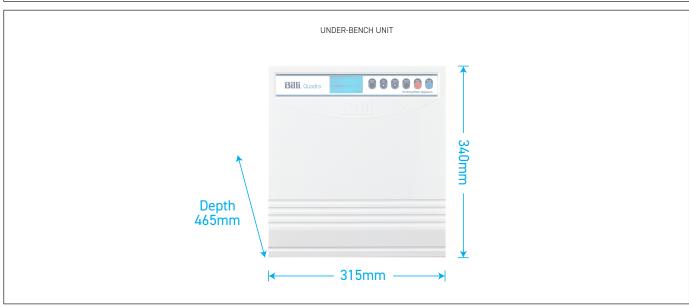

### **INSTALLATION REQUIREMENTS**

#### PREFERRED INSTALLATION LAYOUT

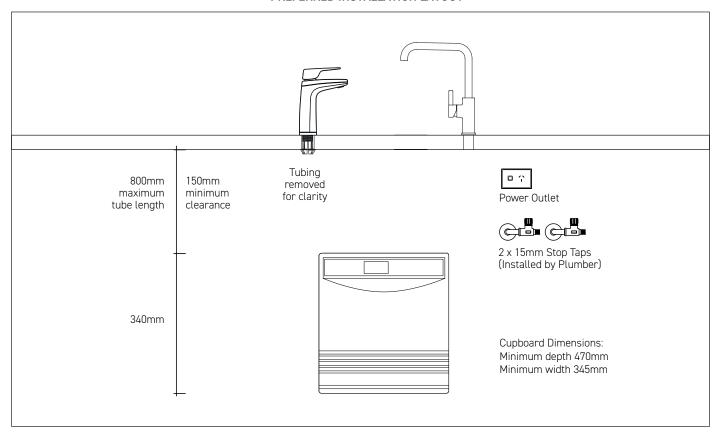

#### **WATER SUPPLY**

Two (2) 1/2" BSP (15mm) stop-taps with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

### **POWER SUPPLY**

A standard 15 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

### **FILTRATION**

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

### **CERTIFICATIONS**

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021525; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; Section J6.6 of the BCA; Global GreenTag LCARate Gold; HACCP: PE-872-WAT-1-02; AS1428 DDA Compliant; WELL Cornerstone Member; WELS 6 star rating registration T40038.

### **WARRANTY**

The Billi Quadra Plus Range is covered by a comprehensive 2 year warranty on all parts and labour.















Billi Australia Pty Ltd 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



