COMMERCIAL DATA SHEET Sahara Plus 320 XL & Paddle



Billi Sahara Plus 320 with XL Levered Dispenser & Paddle Lever Mixer

Enjoy all the space saving benefits of Billi's boiling & still Sahara systems PLUS a separate sink mixer to ensure safety and convenience for all users.

Requiring only cold feed mains supply, the Sahara Plus mixes it's own hot water without the need for any additional under-bench space requirements or boosters.

All Sahara Plus boiling & still systems require no joinery ventilation. Supplied standard with a DDA compliant XL levered drinking water dispenser and 6 star rated paddle lever mixer tap, the solution is both functional and appealing.





BOILING





XL Levered Dispenser

Paddle Lever Mixer

Sahara Under-Bench Unit





Features



SPACE SAVING DESIGN





SPLASHEREE



ENERGY



NO CUPROARD



FCO-INTELLIGENCE TECHNOLOGY



AUSTRALIAN DESIGNED & MADE





PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	50° hot water capacity Ltrs	•	Still water delivery (cups per hour)	Power supply (amps)







943025LP

Sahara 320 Plus

XL Levered

Up to 25

120

unlimited


10



A reserve of boiling water is still available after hot water is fully drawn.

Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml





992803 - 120mm Riser & Font

992830 - 120mm Riser










992111 - Paddle Lever Extension*

990714 - Tubing Extension Kit for Plus unit - 1.8mtrs



*available in chrome and matte black finishes only


Finishes




Add the Finish code to the Product Code to finalise your specification, eg. 943025LPMB

TECHNICAL DRAWINGS


PRODUCT DIMENSIONS

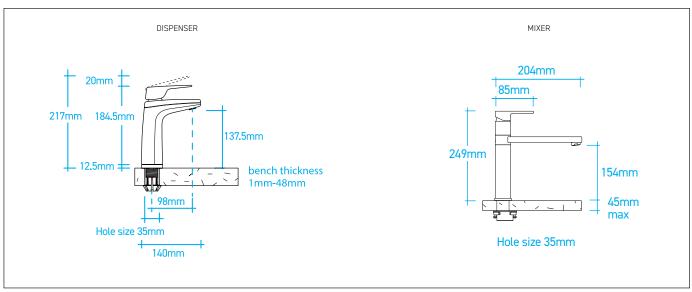

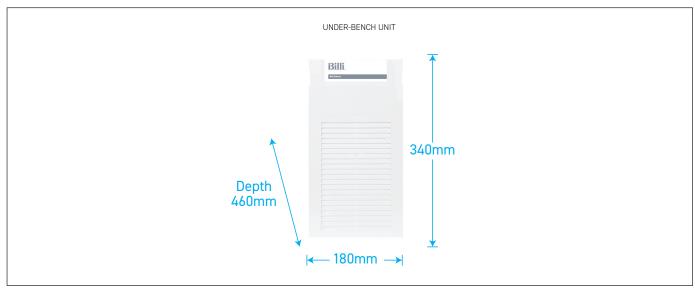

INSTALLATION REQUIREMENTS

PREFERRED INSTALLATION LAYOUT

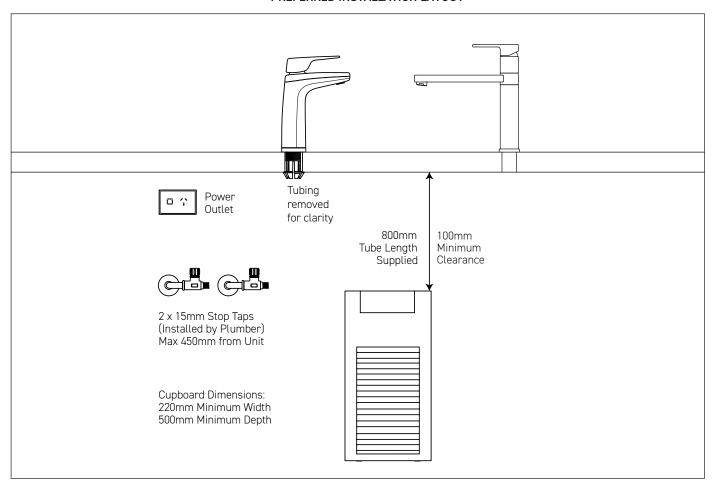

WATER SUPPLY

Two (2) 1/2" BSP (15mm) stop-taps with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

POWER SUPPLY

A standard 10 amp power outlet is required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021525; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; Section J6.6 of the BCA; HACCP: PE-872-WAT-1-02; AS1428 DDA Compliant; WELL Cornerstone Member; WELS 6 star rating registration T40034.

WARRANTY

The Billi Sahara Plus Range is covered by a comprehensive 2 year warranty on all parts and labour.













Billi Australia Pty Ltd 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



