

COMMERCIAL DATA SHEET

Alpine Spring 120



Billi Alpine Spring 120

Ideal for corporate kitchens, cafes, boardrooms, breakouts and hydration stations, this high volume solution offers bottomless still, chilled and sparkling water on tap from a compact underbench system.

The versatile Alpine Spring 120 allows rapid bottle filling to keep your workplace hydrated and productive and is delivered complete with installation kit and font tray accessory.



STILL



CHILLED



SPARKLING



Triple Cobra Head Dispenser

Alpine Sparkling Under-Bench Unit



Features



ICE BANK TECHNOLOGY



SPACE SAVING DESIGN



ENERGY EFFICIENT



ADJUSTABLE CHILLED TEMPERATURE



ADJUSTABLE SPARKLING LEVEL



RAPID BOTTLE FILL



HACCP CERTIFIED



ITALO-AUSTRALIAN PARTNERSHIP

* Italian design & made Sparkling unit

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	Capacity (per hour)	Power supply (amps)
------------	--------------	------------	-----------	-------------------------	---------------------	---------------------



842206

Alpine Spring 120 Ltr

Triple Cobra Head

Up to 150

120 litres

10

Accessories

Still, Chilled & Sparkling Decals (included)

Install Kit (included)

Font tray (included)

Triple Cobra Head dispenser (included)



Finishes



Standard Finish

CH - Chrome


Add the Finish code to the Product Code to finalise your specification, eg. 842206CH

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

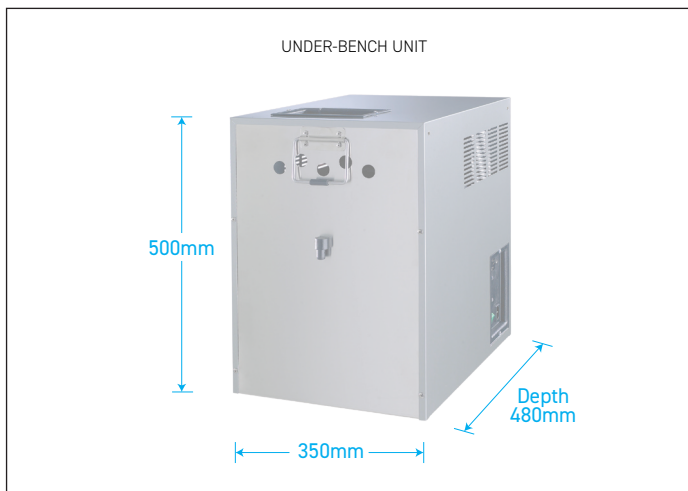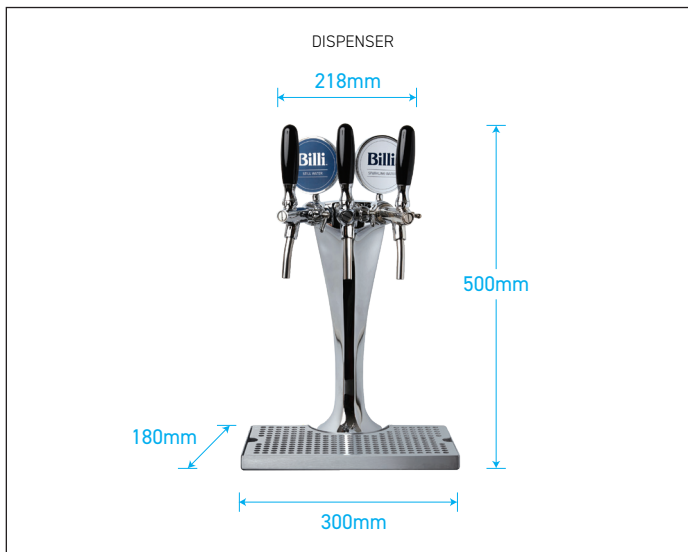

PREFERRED INSTALLATION LAYOUT

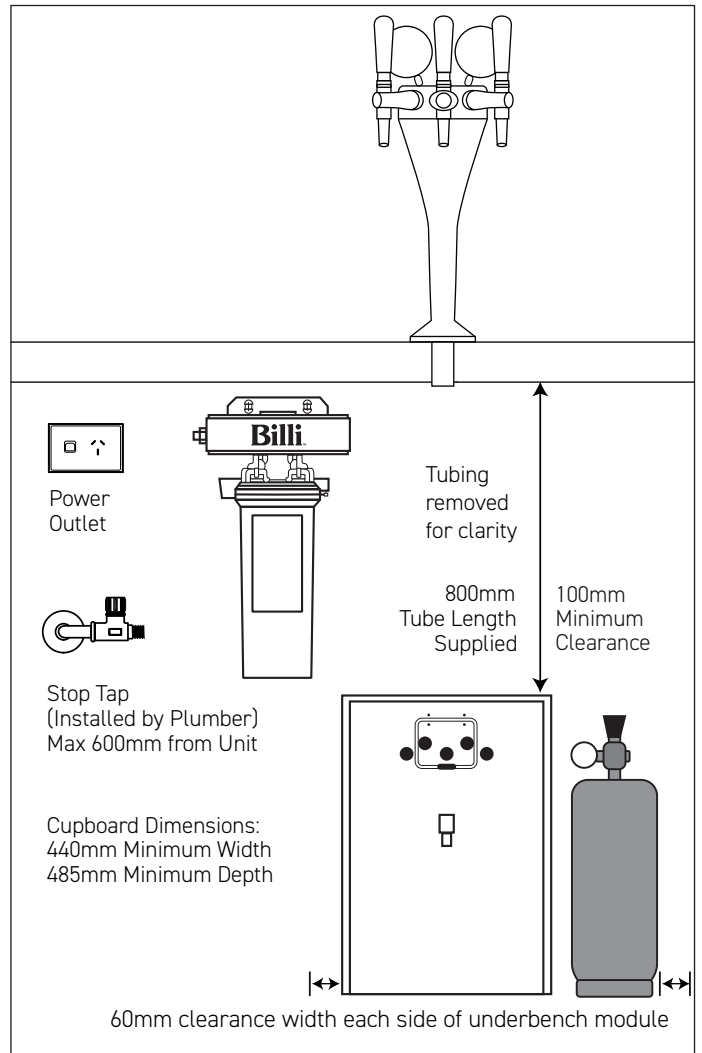

WATER SUPPLY

A single cold water supply point with a 1/2" BSP stop tap is required. Stop tap is to be installed in an easily accessible position, within 600 mm of the inlet to the boiling water module. Dynamic supply pressure: Min. 250 kPa, max 600kPa. Supply temp min. 5°C, max. 30°C.

POWER SUPPLY

A single 10 amp GPO is required installed in an accessible position. Refer to Diagram 1. Power circuits must be fitted with an earth leakage protection device (RCD). Chilled water module is supplied with a 1 meter flex cord and plug.

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022607; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; HACCP: PE-872-WAT-2-02; WELL Cornerstone Member.

WARRANTY

The Billi Sparkling Suite / Alpine Spring Range is covered by a comprehensive 2 year warranty on all parts and labour.

Billi™

Billi Australia Pty Ltd
42 Lucknow Crescent,
Thomastown, Victoria
3074 Australia

P 1800 812 321
F +61 3 9469 0499
W www.billi.com.au

visit us at



Designed and manufactured in Australia to the highest quality standards