HOME DATA SHEET Home BC XL





Billi Home BC with XL Levered Dispenser

Instant boiling water or chilled water available any time of the day or night. The most popular model in the Billi Home range, the Billi Home BC is ideal for typical family use. The Home BC is space saving, energy efficient and elegant with a functional style designed for convenience and safety.

The modern XL levered dispenser is streamlined and elegant with a concealed safety lock feature to protect against scalding, and is available in a range of designer finishes to suit any modern kitchen.

Supplied standard with 994052 sub-micron filtration from BWT to deliver the freshest tasting water and ensure the health of your family & guests.





XL Levered Dispenser

Home BC Under-Bench Unit

Billi

Features











SPACE SAVING DESIGN

DELIVERY

EFFICIENT











CHILLED TEMPERATURE

RANGE OF FINISHES

EASY INSTALLATION

DESIGNED & MADE

GREENTAG

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Power supply (amps)	Suggested usage
BOILING CHILLED	915000L	Home BC	XL Levered	10	Drinking water filtrationCooking & Food preparationInstant Chilled beveragesSterilisation of baby bottles

Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

Accessories

992800 - 70mm Riser & Font

992820 - 70mm Riser



992830 - 120mm Riser









990720 - Tubing Extension Kit for X series dual temp dispensers 2mtrs

Finishes

Standard Finishes

CH - Chrome

BR - Brushed

Special Order Finishes

BRG - Brushed Rose Gold

GM - Gun Metal Grey

Add the Finish code to the Product Code to finalise your specification, eg. 915000LMB

MB - Matte Black MW - Matte White RG - Rose Gold PL - Platinum

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

217mm 184.5mm 137.5mm bench thickness 1mm-48mm 140mm



WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.


POWER SUPPLY

A standard 10 amp power outlet is required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

PREFERRED INSTALLATION LAYOUT

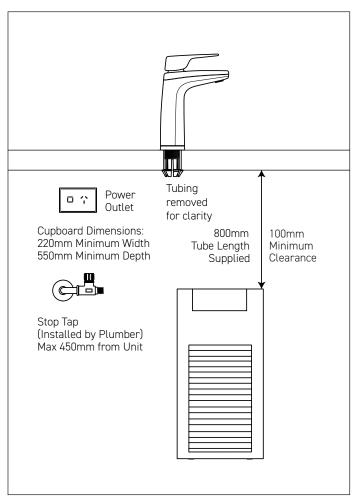

Filter supplied: 994052 (0.2 micron). Replacement filters available: 994051 (5 micron option), 994054 (HSD option), 994055 (XPHSD Fibron XP), 994056 (Sediment only) and 994060 (Micron HF Sediment Only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021525; Certified to AS/NZ3498 and AS/NZ 4020; ISO 9001:2015, QEC 11627; Section J6.6 of the BCA; AS1428; Global GreenTag; CARate Gold; WELL Cornerstone Member; HACCP: PE-872-WAT-1-02.

WARRANTY

The Billi Home BC Range is covered by a comprehensive 2 year warranty on all parts and labour.















Billi Australia Pty Ltd 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



