HOME RANGE DATA SHEET Billi Home BCS - XL





Billi Home BCS with XL Levered Dispenser

The Billi Home BCS system is the ultimate multi-use home water appliance. Delivering instant boiling & chilled water with the added luxury of sparkling filtered water at your fingertips.

All output preferences are dispensed from a single stylish above bench tap, with concealed safety lock feature and available in a range of designer finishes to suit any modern kitchen.

Supplied standard with 994052 sub-micron filtration from BWT to deliver the freshest tasting water and ensure the health of your family & guests.







BOILING

CHILLED SPARKLING

XL Levered Dispenser

Billi Home BCS Under-Bench Unit







Features











SAFE TO OPERATE

ENERGY EFFICIENT

DELIVERY

TEMPERATURE

ADJUSTABLE **SPARKLING** I FVFI



EXCHANGE



COOLED

TECHNOLOGY TECHNOLOGY



FINISHES





& MADE

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Power supply	Suggested usage
BOILING CHILLED SPARKLING	925100L	Billi Home BCS	XL Levered	(amps)	 Drinking water filtration Cooking & Food preparation Instant Hot or Chilled beverages Sterilisation of baby bottles Cocktails & Mocktails

Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

Accessories

992800 - 70mm Riser & Font

992820 - 70mm Riser



992803 - 120mm Riser & Font









990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

Finishes

Standard Finishes

BR - Brushed CH - Chrome

MB - Matte Black MW - Matte White Special Order Finishes

PL - Platinum

RG - Rose Gold


BRG - Brushed Rose Gold

GM - Gun Metal Grey

Add the Finish code to the Product Code to finalise your specification, ea. 925100LMB


TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

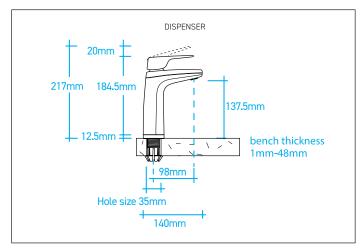



PREFERRED INSTALLATION LAYOUT

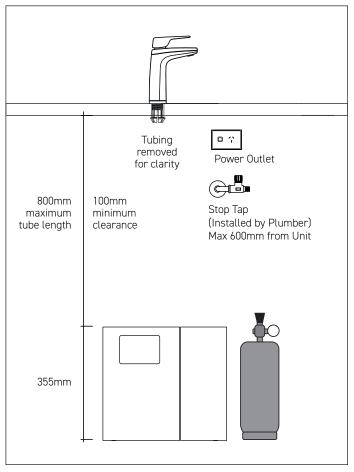

WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

POWER SUPPLY

A single standard 10 amp power outlets are required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene. Filter supplied: 994052 (0.2 micron). Replacement filters available: 994051 (5 micron option), 994054 (HSD option), 994055 (XPHSD Fibron XP), 994056 (Sediment only) and 994060 (Micron HF Sediment Only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM 021525; Tested to ATS5200.105 and AS/NZ 4020; ISO 9001:2015, QEC 11627; AS1428; WELL Cornerstone Member.

CO₂ Cylinder

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

WARRANTY

The Billi Home BCS Range is covered by a comprehensive 3 year warranty on all parts and labour.













Billi Australia Pty Ltd 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



