



# COMMERCIAL DATA SHEET

## Alpine 120 Extended Square Slimline

### Billi Alpine 120 with Extended Square Slimline Dispenser

The Alpine Chilled (still) drinking water system, is a mid-sized commercial capacity system, that maintains Billi's core design principles of space saving and vent-free installation. Dispensing chilled water on demand, with a continuous supply of cool filtered water once tank capacity is depleted, the Alpine range is convenient and highly functional in offering uninterrupted hydration.

The Slimline dispenser offers a sophisticated and clean aesthetic, with a simple self-return pin lever operation for safety & sustainability.



CHILLED



Up to 25

### Features



AUSTRALIAN  
DESIGNED  
& MADE



WATER  
COOLED  
TECHNOLOGY



SPACE SAVING  
DESIGN



VENT-FREE  
INSTALLATION



ECO-INTELLIGENCE  
ENERGY MODES



UNLIMITED  
FILTERED  
WATER

Extended Square  
Slimline Dispenser



Alpine 120  
Under-Bench Unit



### Finishes

#### Standard Finishes



CH -  
Chrome



BR -  
Brushed



MB -  
Matte Black

Add the relevant Finish Code to the Product code to complete your specification eg 932120ECH-LF

### Accessories

#### 992810 - Slimline Font




#### 990724 - Tubing Extension Kit for Slimline 2mtrs



### Product Specifications

|                          |                                                                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Water Type               | C                                                                                                                                                                                                                               |
| Dispenser                | E - Extended Square Slimline Dispenser                                                                                                                                                                                          |
| Mixer Tapware            | N/A                                                                                                                                                                                                                             |
| Product Code             | 932120E                                                                                                                                                                                                                         |
| Warranty                 | 3 years manufacturers warranty                                                                                                                                                                                                  |
| Under-Bench Dimensions   | 180mm(W) x 340mm (H) x 460mm (D)                                                                                                                                                                                                |
| Boiling Output           | N/A                                                                                                                                                                                                                             |
| Chilled Output           | Up to 120 cups per hour                                                                                                                                                                                                         |
| Sparkling Output         | N/A                                                                                                                                                                                                                             |
| 50°C Hot Water Output    | N/A                                                                                                                                                                                                                             |
| Min / Max Dispenser Temp | 6°C / 12°C                                                                                                                                                                                                                      |
| Power Plug               | 10 amp                                                                                                                                                                                                                          |
| Power Rating             | 300W, 220-240V, 50-60Hz                                                                                                                                                                                                         |
| Water Pressure           | Min. 250kPa                                                                                                                                                                                                                     |
| Ecolabel                 | N/A                                                                                                                                                                                                                             |
| EPD                      | N/A                                                                                                                                                                                                                             |
| Greenstar Contribution   | N/A                                                                                                                                                                                                                             |
| Watermark License        | WM-021882                                                                                                                                                                                                                       |
| Lead Free                | ✓                                                                                                                                                                                                                               |
| Section J7.7 (NCC)       | ✓                                                                                                                                                                                                                               |
| WELS                     | N/A                                                                                                                                                                                                                             |
| WELL                     | Cornerstone Membership                                                                                                                                                                                                          |
| Management Systems       | Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with:<br>ISO9001 for QMS (FS 790754),<br>ISO14001 for EMS (EMS 801468) and<br>ISO45001 for OSHS (OHS 801469). |
| Food Handling            | HACCP License No. PE-138-BIL-R1-02                                                                                                                                                                                              |
| Filtration               | 994051 - 5.0 Micron supplied standard                                                                                                                                                                                           |

Scan the QR code access  
our Revit families on  
**bimstore**




## Technical Drawings

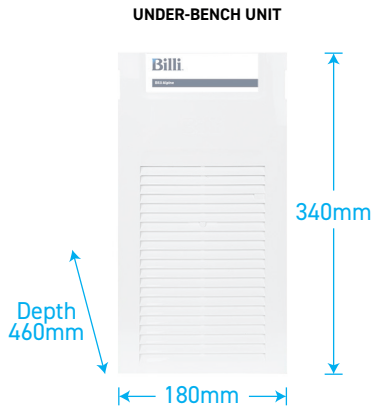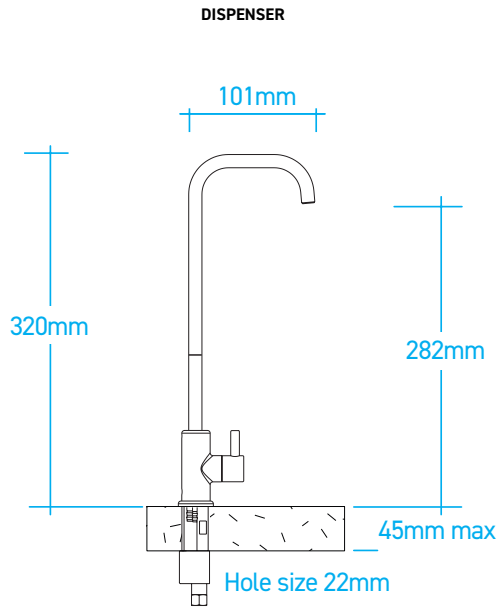

\* Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.

## Installation Requirements

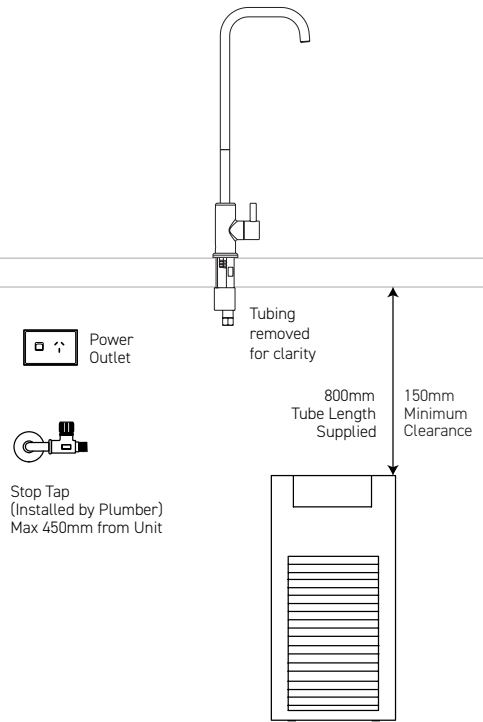

## Installation Notes

### Electrical

A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

### Water

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

### Pressure Valve

Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.

### Stone Benches

Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.

### Ventilation

No joinery ventilation or accessories are required for this Billi product (water cooled technology).

## Filtration - Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.




**994051 - (5.0 micron)**

Supplied standard.  
Commercial & high volume sites.



**994052 - (0.2 micron)**

Fine filtration.  
Residential or Critical Care sites.



Please scan the QR code for all support information.

**Billi Australia Pty Ltd**

**P** 1800 812 321  
**W** [www.billi.com.au](http://www.billi.com.au)

**Billi New Zealand Ltd**

**P** 0800 636 0 636  
**W** [www.billi.co.nz](http://www.billi.co.nz)

**Billi**