COMMERCIAL DATA SHEET
Alpine 120 Round Slimline

Billi Alpine 120 with Round Slimline Dispenser

The Alpine Chilled (still) drinking water system, is a mid-sized commercial capacity system, that maintains Billi's core design principles of space saving and vent-free installation. Dispensing chilled water on demand, with a continuous supply of cool filtered water once tank capacity is depleted, the Alpine range is convenient and highly functional in offering uninterrupted hydration.

The Slimline dispenser offers a sophisticated and clean aesthetic, with a simple self-return pin lever operation for safety & sustainability.

CHILLED

Up to 25

Features

AUSTRALIAN DESIGNED & MADE

WATER COOLED TECHNOLOGY

SPACE SAVING DESIGN

VENT-FREE INSTALLATION

ECO-INTELLIGENCE ENERGY MODES

UNLIMITED FILTERED WATER

Round Slimline Dispenser



Alpine 120 Under-Bench Unit



Finishes

Standard Finishes

CH - Chrome

BR - Brushed

MB - Matte Black

MW - Matte White

Special Order Finishes

UB - Urban Brass

GM - Gun Metal Grey

Add the relevant Finish Code to the Product code to complete your specification eg 932120RCH-LF

Accessories

992810 - Slimline Font



990724 - Tubing Extension Kit for Slimline 2mtrs


Product Specifications

Water Type	C
Dispenser	R - Round Slimline Dispenser
Mixer Tapware	N/A
Product Code	932120R
Warranty	3 years manufacturers warranty
Under-Bench Dimensions	180mm(W) x 340mm (H) x 460mm (D)
Boiling Output	N/A
Chilled Output	Up to 120 cups per hour
Sparkling Output	N/A
50°C Hot Water Output	N/A
Min / Max Dispenser Temp	6°C / 12°C
Power Plug	10 amp
Power Rating	300W, 220–240V, 50–60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021882
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	N/A
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	HACCP License No. PE-138-BIL-R1-02
Filtration	994051 - 5.0 Micron supplied standard


Scan the QR code access our Revit families on bimstore

Technical Drawings

DISPENSER

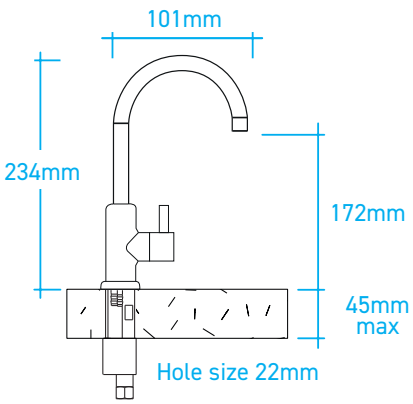


UNDER-BENCH UNIT

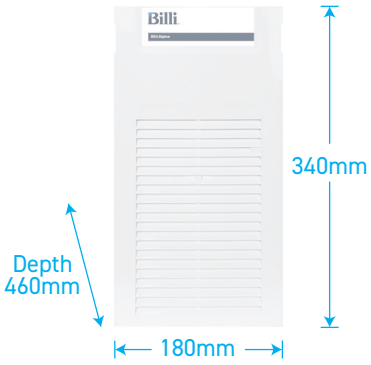

* Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.

Installation Requirements

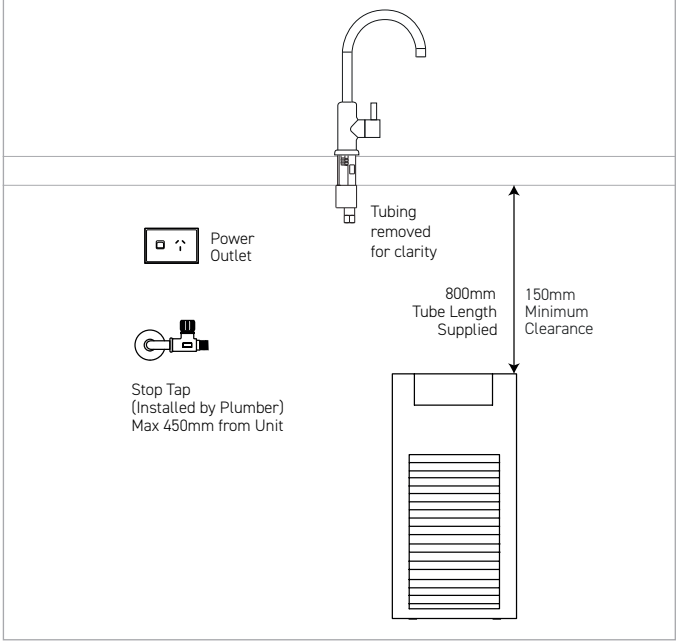

Installation Notes

Electrical	A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.
Water	A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.
Pressure Valve	Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.
Stone Benches	Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.
Ventilation	No joinery ventilation or accessories are required for this Billi product (water cooled technology).

Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994051 - (5.0 micron)

Supplied standard.
Commercial & high volume sites.



994052 - (0.2 micron)

Fine filtration.
Residential or Critical Care sites.

Lead Free

ISO 9001 Quality Management Systems CERTIFIED
ISO 14001 Environmental Management CERTIFIED
ISO 45001 Occupational Health and Safety Management CERTIFIED

Technical support
Book a service call
Filtration & service
Warranty registration

Please scan the QR code for all support information.

Billi Australia Pty Ltd
P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd
P 0800 636 0 636
W wwww.billi.co.nz

All service work in relevant state is provided under license: WA Lic number PL10956 - QLD Lic number 15089576 - NSW Lic number 392108C - SA Lic number PGE5081.