

#### Billi Quadra Plus 9 with XL Levered Dispenser & Square Mixer

Enjoy all the space saving benefits of Billi's water cooled boiling and chilled Quadra systems PLUS a separate sink mixer to ensure safety and convenience for all users.

Requiring only cold feed mains supply, the Quadra Plus mixes it's own hot water without the need for any additional under-bench space requirements or boosters. All Quadra Plus boiling & chilled models are Global Greentag certified to a Gold standard and require no joinery ventilation.

Supplied standard with a DDA compliant XL levered drinking water dispenser and 6 star rated mixer tap, the solution is both functional and appealing.



BOILING



CHILLED



PLUS



Up to 60

#### Features



AUSTRALIAN  
DESIGNED  
& MADE



WATER  
COOLED  
TECHNOLOGY



ENERGY  
RECLAIM  
TECHNOLOGY



SPACE SAVING  
DESIGN



VENT-FREE  
INSTALLATION



ECOLABEL  
CERTIFIED

XL Levered  
Dispenser



Square  
Mixer



Quadra Plus 9  
Under-Bench Unit



#### Finishes

Standard Finishes



CH -  
Chrome



BR -  
Brushed



MB -  
Matte Black



MW -  
Matte White

Special Order Finishes



UB -  
Urban Brass



GM -  
Gun Metal Grey

Add the relevant Finish Code to the Product code to complete your specification, eg. 904065LSCH-LF

#### Accessories

992800 - 70mm Riser & Font



992820 - 70mm Riser



992803 - 120mm Riser & Font



992830 - 120mm Riser



990720 - Tubing Extension Kit for X series dual temp dispensers 2mtrs

#### Product Specifications

|                          |                                                                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Water Type               | BCHA                                                                                                                                                                                                                            |
| Dispenser                | L - XL Levered Dispenser                                                                                                                                                                                                        |
| Mixer Tapware            | S - Square Mixer                                                                                                                                                                                                                |
| Product Code             | 904065LS                                                                                                                                                                                                                        |
| Warranty                 | 3 years manufacturers warranty                                                                                                                                                                                                  |
| Under-Bench Dimensions   | 315mm(W) x 340mm (H) x 465mm (D)                                                                                                                                                                                                |
| Boiling Output           | Up to 180 cups per hour                                                                                                                                                                                                         |
| Chilled Output           | Up to 175 cups per hour                                                                                                                                                                                                         |
| Sparkling Output         | N/A                                                                                                                                                                                                                             |
| 50°C Hot Water Output    | Up to 60L per hour                                                                                                                                                                                                              |
| Min / Max Dispenser Temp | 6°C / 99°C                                                                                                                                                                                                                      |
| Power Plug               | 10 amp                                                                                                                                                                                                                          |
| Power Rating             | 2300W, 220-240V ~ 50-60Hz                                                                                                                                                                                                       |
| Water Pressure           | Min. 250kPa                                                                                                                                                                                                                     |
| Ecolabel                 | Global GreenTag LCARate GOLD                                                                                                                                                                                                    |
| EPD                      | ✓                                                                                                                                                                                                                               |
| Greenstar Contribution   | Up to 16 Points                                                                                                                                                                                                                 |
| Watermark License        | WM-021525 (unit), WM-25901 (tap)                                                                                                                                                                                                |
| Lead Free                | ✓                                                                                                                                                                                                                               |
| Section J7.7 (NCC)       | ✓                                                                                                                                                                                                                               |
| WELS                     | 6 Star - 0133                                                                                                                                                                                                                   |
| WELL                     | Cornerstone Membership                                                                                                                                                                                                          |
| Management Systems       | Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with:<br>ISO9001 for QMS (FS 790754),<br>ISO14001 for EMS (EMS 801468) and<br>ISO45001 for OSHS (OHS 801469). |
| Food Handling            | HACCP License No. PE-872-WAT-1-02                                                                                                                                                                                               |
| Filtration               | 994051 - 5.0 Micron supplied standard                                                                                                                                                                                           |


Scan the QR code access  
our Revit families on

**bimstore**




## Technical Drawings

### DISPENSER

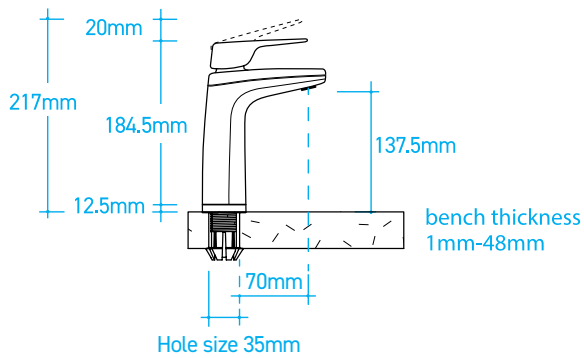


### MIXER

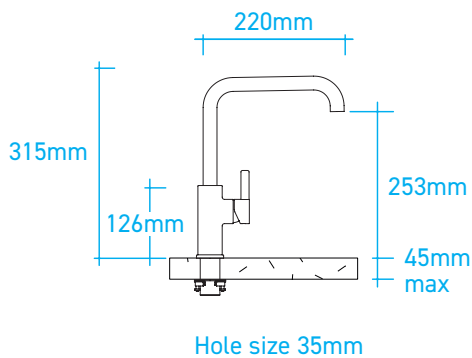

### UNDER-BENCH UNIT



## Installation Requirements

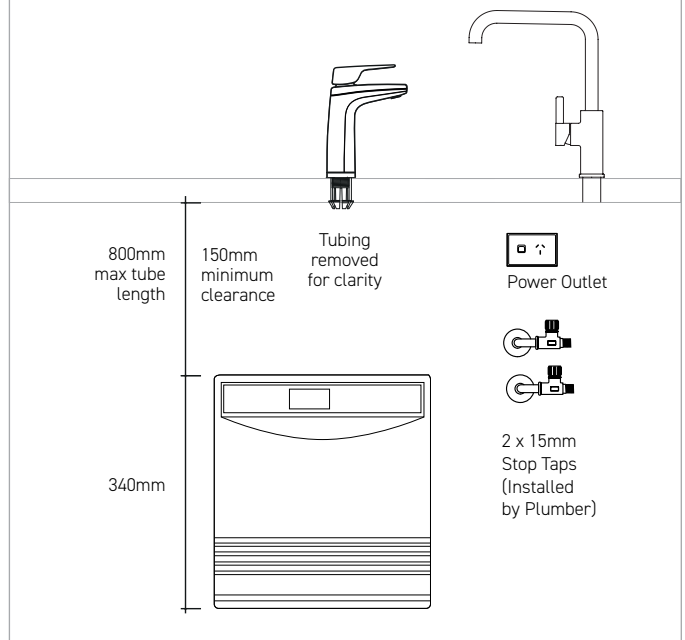

## Installation Notes

|                       |                                                                                                                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Electrical</b>     | A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.                                                                                  |
| <b>Water</b>          | Two (2) Cold 1/2" BSP (15mm) stop-taps with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa. |
| <b>Pressure Valve</b> | Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.                                                                                                                                                    |
| <b>Stone Benches</b>  | Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.                                                                                        |
| <b>Ventilation</b>    | No joinery ventilation or accessories are required for this Billi product (water cooled technology).                                                                                                                                            |

## Filtration - Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



**994051 - (5.0 micron)**

Supplied standard.  
Commercial & high volume sites.



**994052 - (0.2 micron)**

Fine filtration.  
Residential or Critical Care sites.

\*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information



Please scan the QR code for all support information.

**Billi Australia Pty Ltd**  
P 1800 812 321  
W [www.billi.com.au](http://www.billi.com.au)

**Billi New Zealand Ltd**  
P 0800 636 0 636  
W [www.billi.co.nz](http://www.billi.co.nz)

**Billi**