

Billi Quadra Sparkling 4100 with Multifunction Mixer Tap

The Quadra Sparkling is a commercial drinking water solution that delivers instant boiling, chilled, and sparkling filtered water from a single unit. Incorporating underbench ice bank technology, it provides enhanced capacity and rapid recovery, making it ideal for high-demand environments. The system is designed for efficiency and performance while adding the luxury of sparkling water to everyday hydration.

The Good Design Award Winning Multifunction Mixer tap complements the multifunctional approach of Billi's Eco Sparkling range perfectly, negating the requirement for an additional domestic supply mixer tap while providing a sleek solution to dispensing filtered water.



BOILING



CHILLED



SPARKLING



Up to 100

Features



ENERGY EFFICIENT



ADJUSTABLE CHILLED TEMPERATURE



ADJUSTABLE SPARKLING LEVEL



ITALO-AUSTRALIAN PARTNERSHIP



SAFE TO OPERATE



ICE BANK TECHNOLOGY

Australian Made Boiling Unit * Italian Design & Made Sparkling Unit

Multifunction Mixer Tap

Quadra Sparkling Under-Bench Units



Finishes

Standard Finishes

Special Order Finishes



CH - Chrome



BR - Brushed



MB - Matte Black



MW - Matte White



UB - Urban Brass



GM - Gun Metal Grey

Add the relevant Finish Code to the Product code to complete your specification eg 906060GCH-LF


Accessories

990726 - Tube Extension Kit for Sparkling Unit - 2 meters

Product Specifications


Water Type	BC
Dispenser	G - Multifunction Mixer Tap
Mixer Tapware	N/A
Product Code	906100G
Warranty	3 years manufacturers warranty
Under-Bench Dimensions (Boiling)	180mm(W) x 340mm (H) x 460mm (D)
Under-Bench Dimensions (C & S)	255mm(W) x 410mm (H) x 420mm (D)
Boiling Output	Up to 220 cups per hour
Chilled* Output	Up to 200 cups per hour
Sparkling* Output	Up to 200 cups per hour
50°C Hot Water Output	N/A
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	1 x 10 amp, 1 x 15 amp
Power Rating	3400W, 220-240V ~ 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021525 (unit), WM-021914 (tap)
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	5 Star - 0257
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	HACCP - PE-138-BIL-R1-02
Filtration	994051 - 5.0 Micron supplied standard

Scan the QR code access
our Revit families on
bimstore



*Combined usage for Chilled and Sparkling.

Technical Drawings

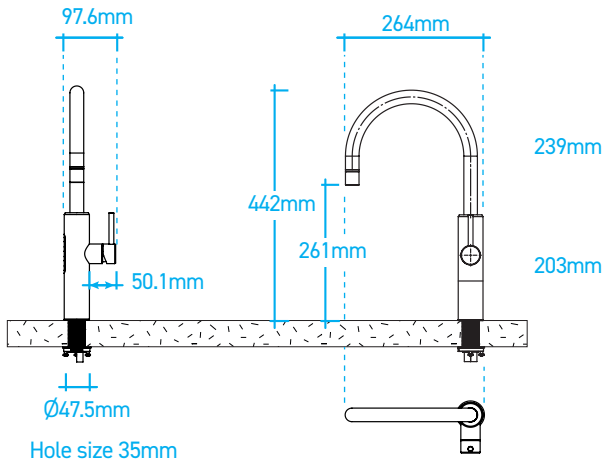


UNDER-BENCH UNITS



Installation Requirements

Please refer to Vent Kit Installation Guide – Ref. No. 611002-02

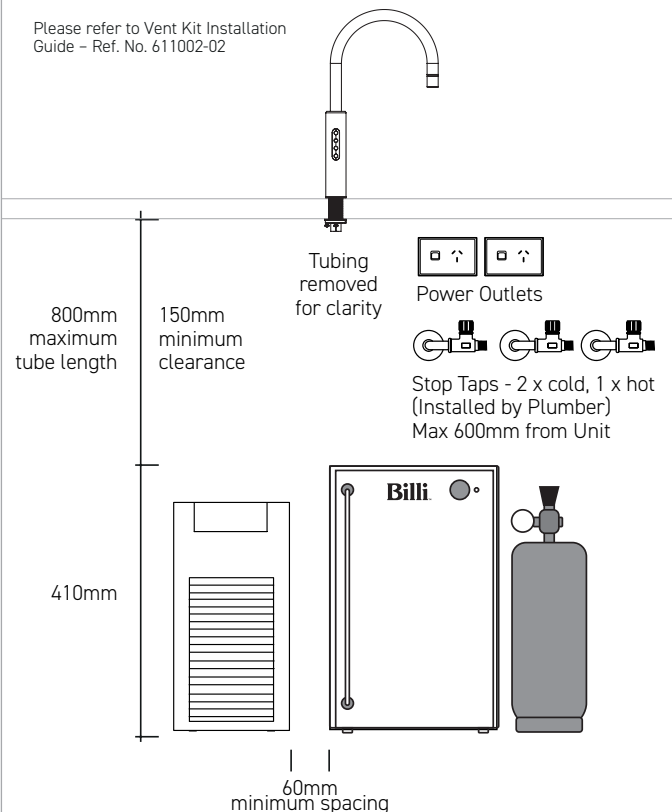

Installation Notes

Electrical

One standard 10 amp and one standard 15 amp power outlets are required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

Water

1 x 1/2" BSP (15mm) cold stop tap required for unit supply and 1 x 1/2" BSP hot stop tap and 1 x 1/2" BSP cold stop tap required for mixer connection with male threads and it should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

Pressure Valve

Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.

CO₂ MSDS

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

Stone Benches

Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.

Ventilation

This is an air cooled product, ventilation is vital under normal operating conditions. Failure to follow manufacturers ventilation recommendations can risk warranty.

Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994051 - (5.0 micron)

Supplied standard.
Commercial & high volume sites.



994052 - (0.2 micron)

Fine filtration.
Residential or Critical Care sites.

* Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi