

Billi Quadra Sparkling 4100 with XL Levered Dispenser

The Quadra Sparkling is a commercial drinking water solution that delivers instant boiling, chilled, and sparkling filtered water from a single unit. Incorporating underbench ice bank technology, it provides enhanced capacity and rapid recovery, making it ideal for high-demand environments. The system is designed for efficiency and performance while adding the luxury of sparkling water to everyday hydration.

The XL Levered dispenser is streamlined and elegant, offering boiling, chilled, and sparkling outputs safely and at your own pace through its intuitive, position-sensitive levers. Fully DDA compliant, it combines accessibility with contemporary design.



BOILING



CHILLED



SPARKLING



Up to 100

Features



ENERGY
EFFICIENT



ADJUSTABLE
CHILLED
TEMPERATURE



ADJUSTABLE
SPARKLING
LEVEL



ITALO-AUSTRALIAN
PARTNERSHIP



SAFE TO
OPERATE



ICE BANK
TECHNOLOGY

Australian Made Boiling Unit * Italian Design & Made Sparkling Unit

XL Levered
Dispenser



Quadra Sparkling
Under-Bench Units



Finishes

Standard Finishes



CH -
Chrome



BR -
Brushed



MB -
Matte Black



MW -
Matte White

Special Order Finishes



UB -
Urban Brass



GM -
Gun Metal Grey



SB -
Sable Bronze

Add the relevant Finish Code to the Product code to complete your specification eg 906100LCH-LF

Accessories

992800 - 70mm Riser & Font



992820 - 70mm Riser



992803 - 120mm Riser & Font



992830 - 120mm Riser




990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

Product Specifications

Water Type	BCS
Dispenser	L - XL Levered Dispenser
Mixer Tapware	N/A
Product Code	906100L
Warranty	3 years manufacturers warranty
Under-Bench Dimensions (Boiling)	180mm(W) x 340mm (H) x 460mm (D)
Under-Bench Dimensions (C & S)	255mm(W) x 410mm (H) x 420mm (D)
Boiling Output	Up to 220 cups per hour
Chilled* Output	Up to 200 cups per hour
Sparkling* Output	Up to 200 cups per hour
50°C Hot Water Output	N/A
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	1 x 10 amp, 1 x 15 amp
Power Rating	3400W, 220-240V ~ 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021525
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	N/A
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	HACCP - PE-138-BIL-R1-02
Filtration	994051 - 5.0 Micron supplied standard


Scan the QR code access
our Revit families on
bimstore



*Combined usage for Chilled and Sparkling.

Technical Drawings

DISPENSER

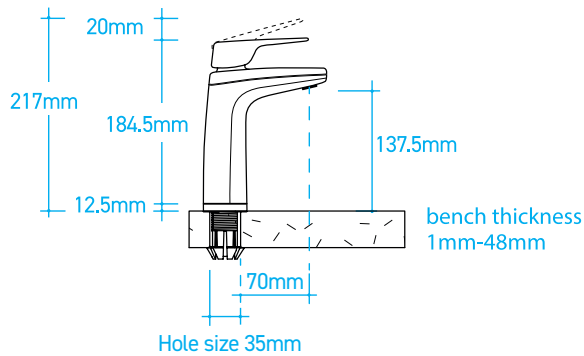

UNDER-BENCH UNITS



Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994051 - (5.0 micron)

Supplied standard.
Commercial & high volume sites.




994052 - (0.2 micron)

Fine filtration.
Residential or Critical Care sites.

* Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.

Installation Requirements

Please refer to Vent Kit Installation Guide – Ref. No. 611002-02

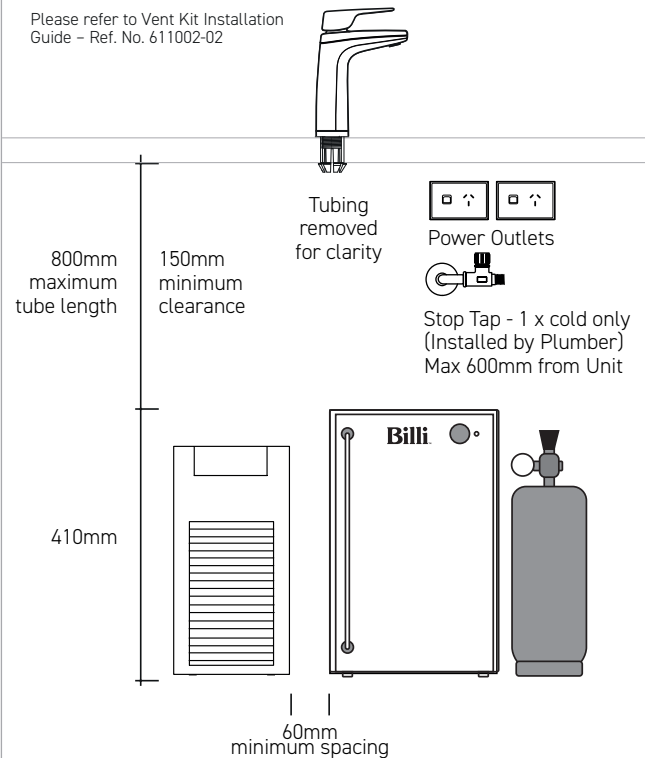

Installation Notes

Electrical

One standard 10 amp and one standard 15 amp power outlets are required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

Water

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

Pressure Valve

Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.

CO2 MSDS


The CO2 gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO2 and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO2 Cylinder - single 996911 or double 996912.

Stone Benches

Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.

Ventilation

This is an air cooled product, ventilation is vital under normal operating conditions. Failure to follow manufacturers ventilation recommendations can risk warranty.



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi