

Billi Home BC with Multifunction Mixer Tap

Instant boiling water or chilled water available any time of the day or night. The most popular model in the Billi Home range, the Billi Home BC is ideal for typical family use. Space saving, energy efficient and elegant with a functional style designed for convenience and safety. .

The Good Design Award winning integrated Multifunction Mixer Tap provides a sleek solution to dispensing filtered water with a touch sensitive interface, alongside domestic mains supplied by operating a standard flick mixer.



BOILING



CHILLED

Features



AUSTRALIAN
DESIGNED &
MADE



SPACE SAVING
DESIGN



ECO-
INTELLIGENCE
TECHNOLOGY



ENERGY
EFFICIENT



EASY
INSTALLATION



ADJUSTABLE
TEMPERATURE

Multifunction Mixer Tap

Home BC Under-Bench Unit



Finishes

Standard Finishes

Special Order Finishes



CH -
Chrome



BR -
Brushed



MB -
Matte Black



MW -
Matte White



UB -
Urban Brass



GM -
Gun Metal Grey



SB -
Sable Bronze

Add the relevant Finish Code to the Product code to complete your specification eg 915000LCH-LF


Accessories

990720 - Tubing Extension Kit for X series dual temp dispensers 2mtrs


Product Specifications

Water Type	BC
Dispenser	G - Multifunction Mixer Tap
Mixer Tapware	N/A
Product Code	915000G
Warranty	3 years manufacturers warranty
Under-Bench Dimensions	180mm(W) x 340mm (H) x 500mm (D)
Boiling Output	Up to 90 cups per hour
Chilled Output	Up to 60 cups per hour
Sparkling Output	N/A
50°C Hot Water Output	N/A
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	10 amp
Power Rating	1600W, 220-240V, 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021525
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	N/A
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	HACCP - PE-138-BIL-R1-02
Filtration	994052 - 0.2 Micron supplied standard

Scan the QR code access
our Revit families on
bimstore




Technical Drawings

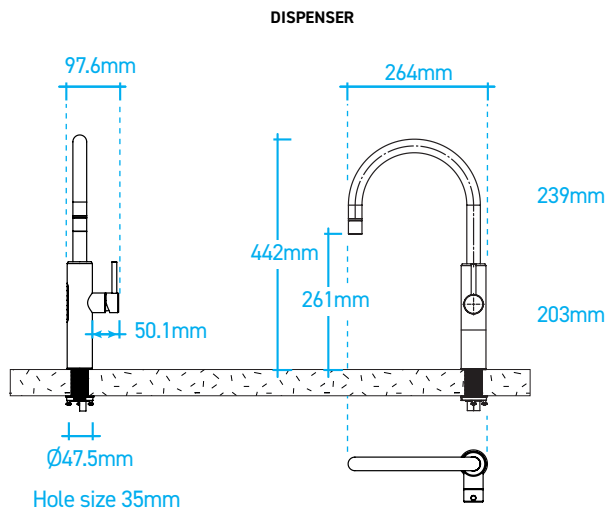

UNDER-BENCH UNIT



Installation Requirements

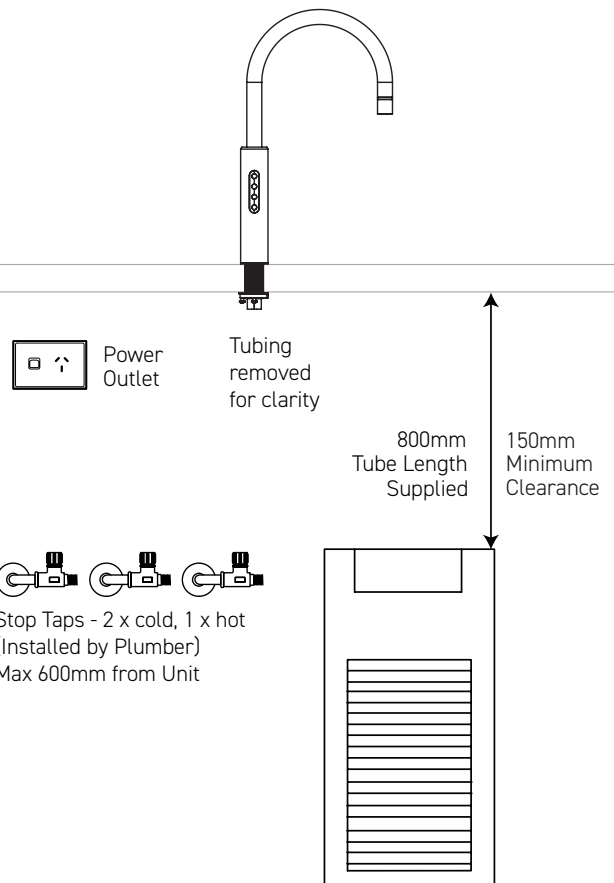

Installation Notes

Electrical	A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.
Water	1 x 1/2" BSP (15mm) cold stop tap required for unit supply and 1 x 1/2" BSP hot stop tap and 1 x 1/2" BSP cold stop tap required for mixer connection with male threads and it should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.
Pressure Valve	Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.
Stone Benches	Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.
Ventilation	No joinery ventilation or accessories are required for this Billi product (no waste heat).

Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994052 - (0.2 micron)

Supplied standard. Residential or Critical Care sites.



994051 - (5.0 micron)

Commercial & high volume sites.

*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi