

Commercial Installation Guide

Filter Tap (932210)



Installation Requirements.

IMPORTANT: This Billi appliance is to be installed by a licensed trades person in accordance with AS/NZS 3500.1 and AS/NZ 3500.2 and in compliance with applicable state regulatory requirements.

For correct operation of this appliance, it is essential to observe the manufacturer's instructions.

Water Supply

The Filter tap must only be connected to a cold water supply. A 15mm stop tap (not supplied) is to be installed in an easily accessible position within 450mm from the Filter Tap water inlet.

1. Determine Dispenser Location



Determine the location of each of the components, taking into account the tube lengths and space available (see Diagram 1).

2. Plan Dispense Position

Determine the position of dispenser mounting hole in sinktop or benchtop. Hole size required is 22mm.

3. Install Components

- Connect the Pressure Limiting Valve (with blue mini-tap) to the mains water supply.
- Connect one end of the white hose provided to the blue mini-tap and connect the other end of the white hose to the Filter Module fitting labeled "IN".
- Mount the Filter Module in an easily accessible position, preferably close to the front of the cupboard to allow for filter changes.
- After establishing where the dispenser can be installed (within the limits of the hose length from the dispenser to Filter Module.) punch a 22mm hole for mounting the dispenser.
- Mount the dispenser by first passing the blue hose through the hole and then fitting the locking bush and lock nut to the threaded mounting shaft (see Diagram 2). Tighten the locknut. Reconnect blue hose to the out fitting.

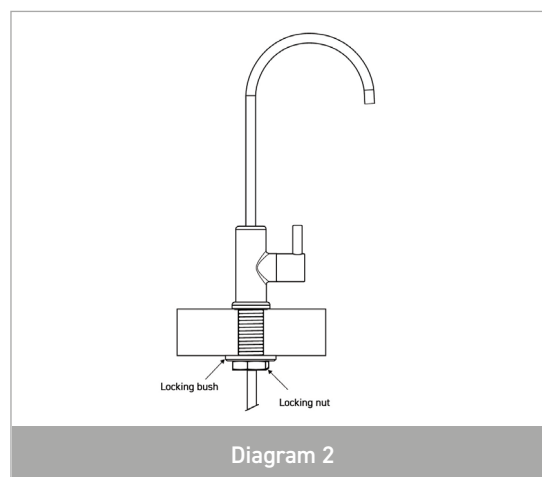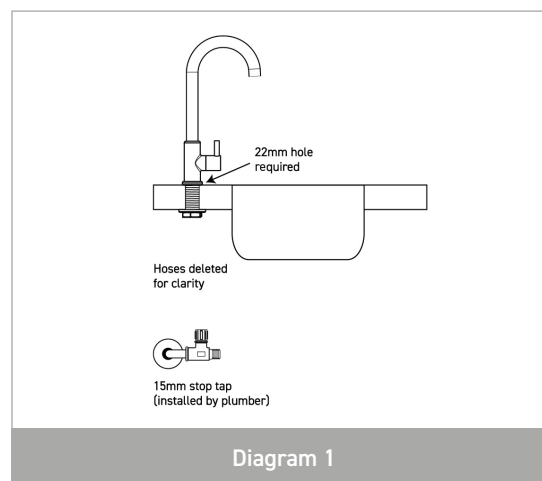


Commissioning Unit

Turn on the mains tap and then turn on the blue mini-tap and check for leaks. If no leaks are detected, rotate the lever on the dispenser until a good stream of water is present.

Note: There may be air bubbles in the water at first as the water filter is dry.

Allow 2-3 minutes of continuous run to ensure all air bubbles have been flushed from the system.

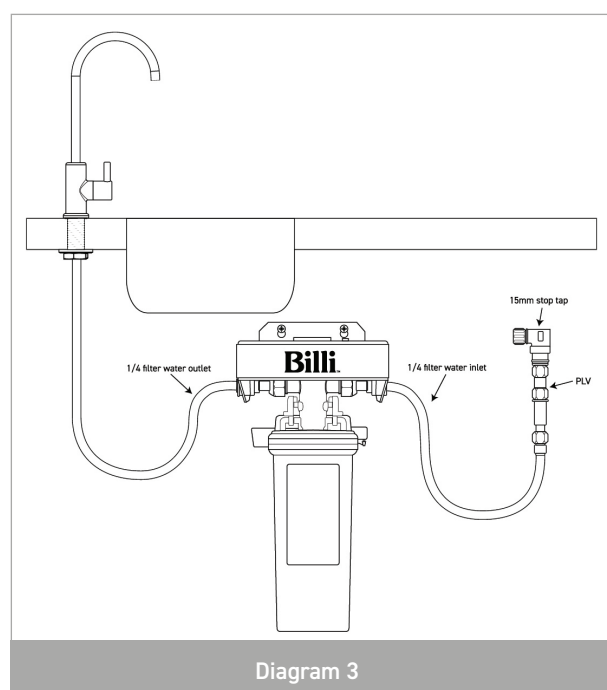

Service Support

Thank you for choosing to install a Billi Filter Tap Drinking Water Appliance. Your Filter Tap is manufactured to exacting standards using high quality materials and with proper maintenance and care, should function for many years.

For information on our filtration and service contract please contact:


Billi Head Office on **1800 812 321**

E-mail (Australia/NZ): service@billi.com.au.

Email (International sales): international.sales@billi.com.au

For technical support please call: **1800 812 321** and speak to one of Billi's experienced technicians.

Filter cartridges are also available for purchase online at www.billi.com.au



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi®

Designed and manufactured in Australia.

Billi® is a registered trademark of Billi Australia Pty Ltd. Billi OmniOne™ is trademark of Billi Australia Pty Ltd. All rights reserved. © Copyright protected.
Billi Australia Pty Ltd has a policy of continual improvement, all details are subject to change without notice. All goods are sold subject to our published terms and conditions.

613302 2

Billi[®]