

Billi® COMMERCIAL DATA SHEET

Quadra Twin Plus 21 XL & Paddle



Boiling



Chilled

Billi Quadra Twin Plus 21 with XL Levered Dispenser & Paddle Mixer

Enjoy all the space saving benefits of Billi's water-cooled boiling and chilled Quadra systems PLUS TWO separate sink mixers to ensure safety and enhanced convenience for all users.

Requiring only cold feed mains supply, the Quadra Twin Plus mixes it's own hot water without the need for any additional under-bench space requirements or boosters.

Quadra Twin Plus models require no joinery ventilation and no more space than a standard Quadra boiling and chilled unit. Supplied standard with a DDA compliant XL levered drinking water dispenser and two 6-star rated lever paddle mixer taps, the solution is both functional and appealing.

Features



Australian
Designed & Made



Space Saving
Design



Energy
Efficient



No Ventilation
Required



Water-Cooled
Technology



Heat Exchange
Technology



Smart Safety

XL Levered
Dispenser



2 x Paddle
Lever Mixers



Quadra Plus
Under-Bench Unit



Product Specifications

Water Type	BCHA
Product Code	904187LP
Model Name	Quadra Twin Plus 21
50° hot water capacity litres (initial drawdown)	21
50° hot water delivery litres per hour	100
Boiling water delivery (cups per hour)*	350
Chilled & Sparkling water delivery (cups per hour)	175
Power supply (amps)	20

*Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

Finishes

Add the Finish code to the Product Code to finalise your specification, eg. 904105LPMB

Standard
Finishes



CH:
CHROME



BR:
BRUSHED



MB:
MATTE BLACK



MW:
MATTE WHITE

Special
Finishes



UB:
URBAN BRASS



GM:
GUN METAL

Accessories

992800 - 70 mm Riser & Font



992820 - 70 mm Riser



992803 - 120 mm Riser & Font



992830 - 120 mm Riser



990714 - Tubing Extension Kit for Plus unit - 1.8 mtrs




FREE to access

Scan the QR code access
our Revit families on


bimstore

Technical Drawing


Dispenser

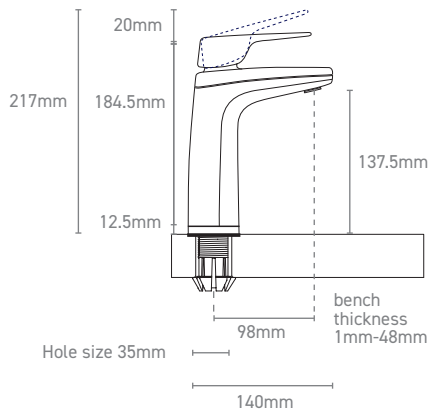


Mixer

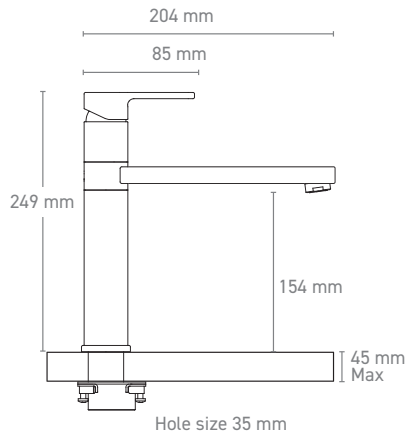

Unde-bench Unit

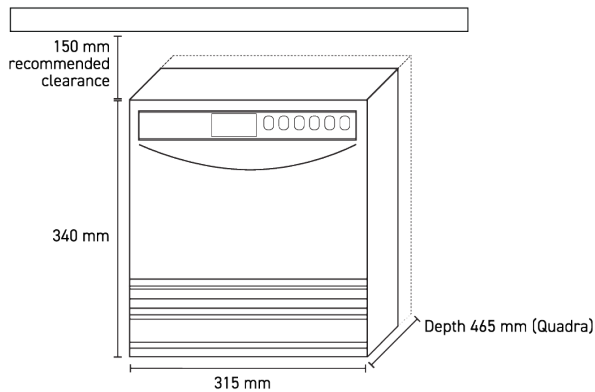

Installation Requirements

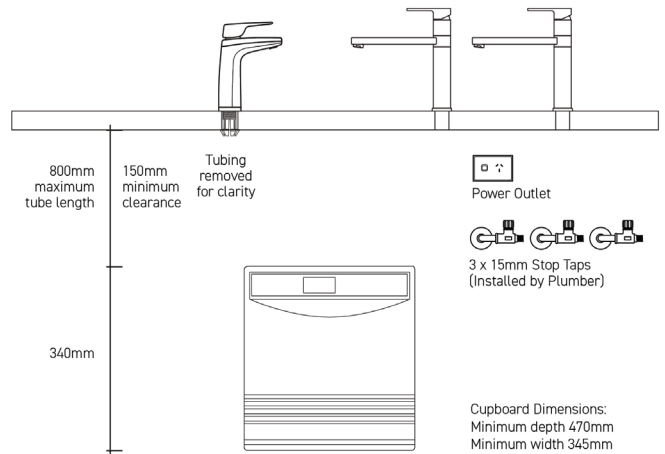

Installation Notes

Water connections

Three (3) 1/2" BSP (15 mm) stop-taps with male threads - one cold water supply to Quadra Plus and two cold water supply to Sink.

Mixer - should be installed in an easily accessible position.

Water supply must be microbiologically safe to drink, with a dynamic pressure of 250kPa at each outlet.

Power supply

A standard 15 amp power outlet is required, no further than 1000 mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

Filtration

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321

W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636

W www.billi.co.nz

Billi