HOME DATA SHEET
Home B5000 Sparkling XL

Billi Home B5000 Sparkling with XL Levered Dispenser

The B5000 Sparkling system is the ultimate multi-use home water appliance. Delivering instant boiling & chilled water with the added luxury of sparkling filtered water at your fingertips.

All output preferences are dispensed from a single stylish above bench tap, with concealed safety lock feature and available in a range of designer finishes to suit any modern kitchen.

Supplied standard with 994052 sub-micron filtration from BWT to deliver the freshest tasting water and ensure the health of your family & guests.

BOILING CHILLED SPARKLING

Features

ICE BANK TECHNOLOGY
ADJUSTABLE CHILLED TEMPERATURE
ADJUSTABLE SPARKLING LEVEL
SPACE SAVING DESIGN
ENERGY EFFICIENT
FRESHER SPARKLING TASTE

XL Levered Dispenser



B5000 Sparkling Under-Bench Units



Finishes

Standard Finishes



CH - Chrome
BR - Brushed
MB - Matte Black
MW - Matte White

Special Order Finishes



UB - Urban Brass
GM - Gun Metal Grey
SB - Sable Bronze

Add the relevant Finish Code to the Product code to complete your specification eg 915100LCH-LF

Accessories

992800 - 70mm Riser & Font



992820 - 70mm Riser



992803 - 120mm Riser & Font



992830 - 120mm Riser



990726 - Tubing Extension Kit for Sparkling unit - 2mtrs


Product Specifications

Water Type	BCS
Dispenser	L - XL Levered Dispenser
Mixer Tapware	N/A
Product Code	915100L
Warranty	3 years manufacturers warranty
Under-Bench Dimensions (Boiling)	180mm(W) x 340mm (H) x 360mm (D)
Under-Bench Dimensions (Cold)	255mm(W) x 410mm (H) x 420mm (D)
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	10 amp
Power Rating	1500W, 220-240V, 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-022690
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	N/A
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	N/A
Filtration	994052 - 0.2 Micron supplied standard


Scan the QR code access our Revit families on **bimstore**

Technical Drawings

DISPENSER

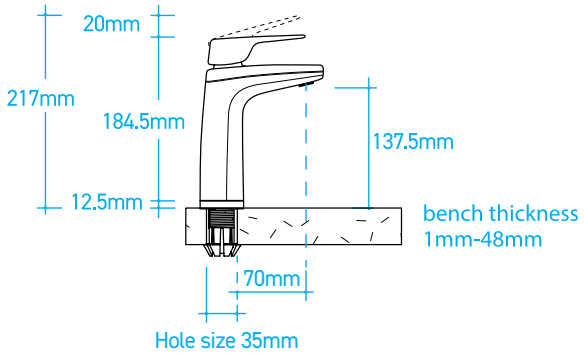

UNDER-BENCH UNITS

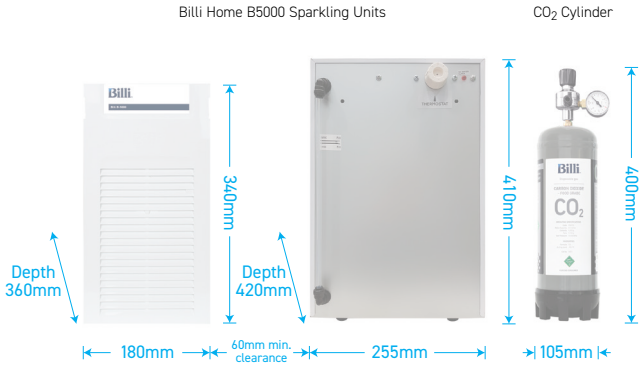

Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.




994052 - (0.2 micron)
Supplied standard.
Residential or Critical Care sites.

994051 - (5.0 micron)
Commercial & high volume sites.

*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.

Installation Requirements

Please refer to Vent Kit Installation Guide – Ref. No. 611002-02

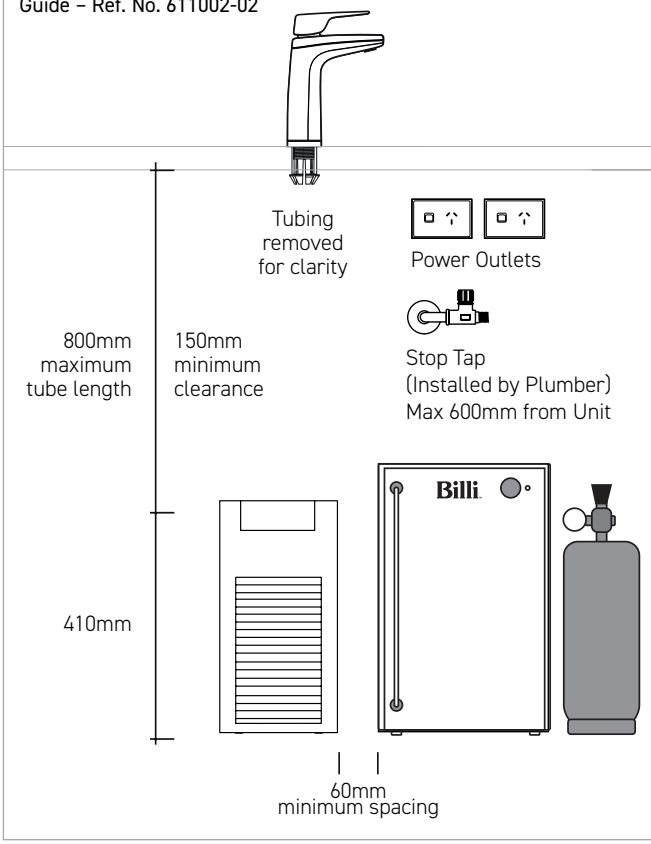

Installation Notes

Electrical	2 x standard 10 amp power outlets are required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.
Water	A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.
Pressure Valve	Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.
CO_2 MSDS	The CO_2 gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO_2 and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO_2 Cylinder - single 996911 or double 996912.
Stone Benches	Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.
Ventilation	This is an air cooled product, ventilation is vital under normal operating conditions. Failure to follow manufacturers ventilation recommendations can risk warranty.

Lead Free

DDA COMPLIANT

Technical support
Book a service call
Filtration & service
Warranty registration

Please scan the QR code for all support information.

Billi Australia Pty Ltd
P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd
P 0800 636 0 636
W wwww.billi.co.nz

All service work in relevant state is provided under license: WA Lic number PL10956 - QLD Lic number 15089576 - NSW Lic number 392108C - SA Lic number PGE5081.