

# COMMERCIAL DATA SHEET

## Quadra 420 Firewall



### Billi Quadra 420 with Firewall Tower Dispenser

The Quadra 420 Boiling and Chilled drinking water system is a water cooled, high capacity, intermediate population commercial drinking water solution that maintains the core Billi design principles and requires no joinery ventilation. The drawcard for the entire Quadra range is the use of innovative energy reclaim technology which enables space savings, energy efficiency and completely eliminates exhaust heat transfer. All Quadra boiling and chilled products are Global Greentag certified to a Gold standard.

Ideal for patients and residents in health and aged-care environments, the Firewall® Tower Dispenser offers a unique above bench tower design, to guarantee 99.99% pure water, 100% of the time. The system leverages UVC technology uniquely positioned at the point of dispense, rendering waterborne bacteria incapable of reproduction, moments before it is delivered.

The Firewall® Tower Dispenser also features BioCote® technology that protects surfaces against bacteria, mould and fungi. There is no need to specify a carbon free filter to support the bactericidal & virucidal effect of the Firewall Tower dispenser.



FIREWALL®



Firewall Tower Dispenser

Quadra Under-Bench Unit



### Features



SPACE SAVING DESIGN



SAFE TO OPERATE



ENERGY EFFICIENT



WATER COOLED TECHNOLOGY



HEAT EXCHANGE TECHNOLOGY



NO CUPBOARD VENTILATION REQUIRED



AUSTRALIAN DESIGNED & MADE



GREENTAG CERTIFIED



FIREWALL IS PROVEN COVID-SECURE INDEPENDENTLY TESTED

## PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Suggested number of people	Boiling water delivery (cups per hour)*	Chilled water delivery (cups per hour)	Power supply (amps)
	904020FT	Quadra 420 Firewall Tower Dispenser	Up to 25	120	175	1x10 1x10



\* Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all under bench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml.

### Accessories


852255 - Firewall Tower font assembly

# TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

## PRODUCT DIMENSIONS

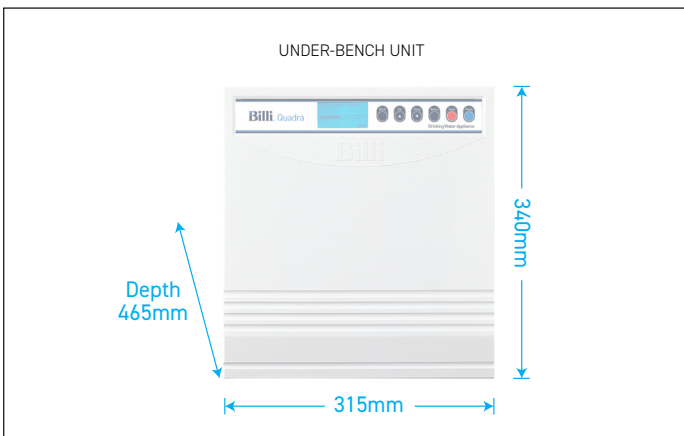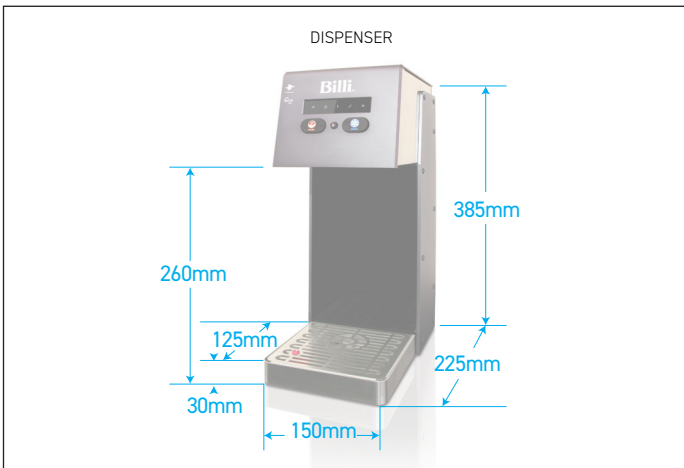

## PREFERRED INSTALLATION LAYOUT

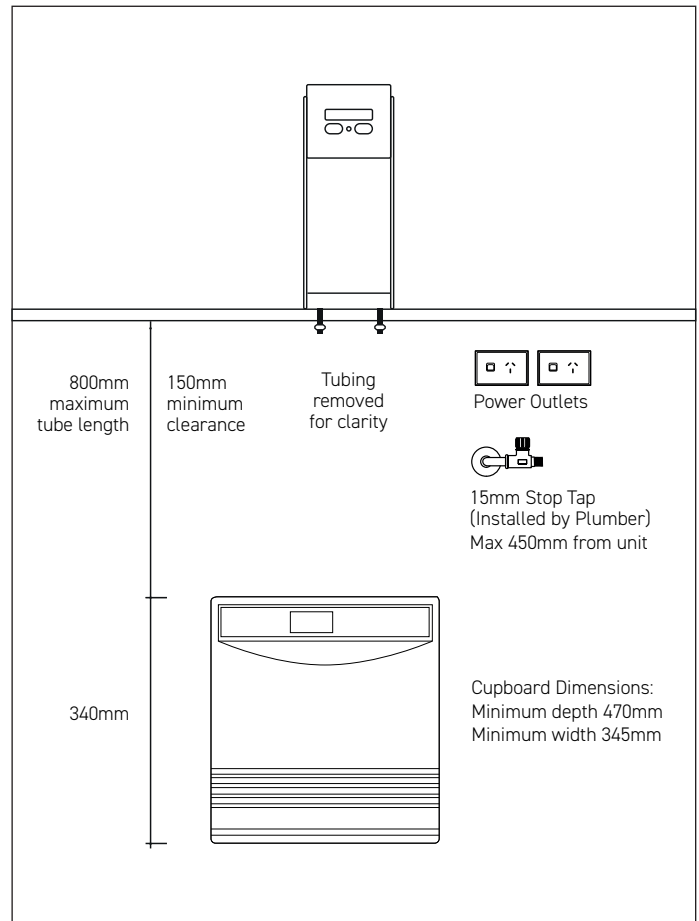

### WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

### POWER SUPPLY

A standard 10 amp power outlet is required for the underbench PLUS a standard 10 amp power outlet for the Firewall Tower dispenser. Both outlets located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

### FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

### CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including:

Watermark: WM-021525;  
 Certified to AS/NZ3498 and AS/NZ 4020;  
 ISO9001:2015, QEC 11627;  
 Section J6.6 of the BCA;  
 Global GreenTag LCARate Gold;  
 HACCP: PE-872-WAT-1-02;  
 NSF P231 for Microbiological Purification;  
 NSF/ANSI 55 Class A;  
 WELL Member Mark.

### WARRANTY

The Billi Quadra Range is covered by a comprehensive 2 year warranty on all parts and labour.

# Billi™



Billi Australia Pty Ltd  
 42 Lucknow Crescent,  
 Thomastown, Victoria  
 3074 Australia

P 1800 812 321  
 F +61 3 9469 0499  
 W www.billi.com.au

visit us at



Designed and manufactured in Australia to the highest quality standards