

COMMERCIAL DATA SHEET

Sahara Plus Range - XR & Paddle



Billi Sahara Plus Range with XR Remote Dispenser & Paddle Lever Mixer

Enjoy all the space saving benefits of Billi's boiling & still Sahara systems PLUS a separate sink mixer to ensure safety and convenience for all users.

Requiring only cold feed mains supply, the Sahara Plus mixes it's own hot water without the need for any additional under-bench space requirements or boosters.

All Sahara Plus boiling & still systems require no joinery ventilation. Supplied standard with the innovative and thoughtful XR remote control panel drinking water dispenser, (useful for ambulant or wheelchair inclusive access), and 6 star rated paddle lever mixer tap, the solution is both functional and appealing.



BOILING



STILL



PLUS



Up to 120

XR Remote Dispenser



Paddle Lever Mixer



Sahara Under-Bench Unit



Features

- SPACE SAVING DESIGN
- SAFE TO OPERATE
- SPLASHFREE DELIVERY
- ENERGY EFFICIENT
- NO CUPBOARD VENTILATION REQUIRED
- ECO-INTELLIGENCE TECHNOLOGY
- AUSTRALIAN DESIGNED & MADE
- HACCP CERTIFIED
- EASY INSTALLATION

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	50° hot water capacity Ltrs	50° hot water delivery (Ltrs per hour)	Boiling water delivery (cups per hour)*	Still water delivery (cups per hour)	Power supply (amps)
 BOILING STILL	943125RP	Sahara 3120 Plus	XR Remote	Up to 120	15	65	250	unlimited	15
 PLUS									

A reserve of boiling water is still available after hot water is fully drawn.

* Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

Accessories

992800 - 70mm Riser & Font



992820 - 70mm Riser



992803 - 120mm Riser & Font



992830 - 120mm Riser



992111 - Paddle Lever Extension*



990714 - Tubing Extension Kit for Plus unit - 1.8mtrs

*available in chrome and matte black finishes only

Finishes



Standard Finish

CH - Chrome

*Add the **finish** and **country** codes in the product code to complete the specification. Eg - 943125RPCHAE for Matte Black.


TECHNICAL DRAWINGS

PRODUCT DIMENSIONS

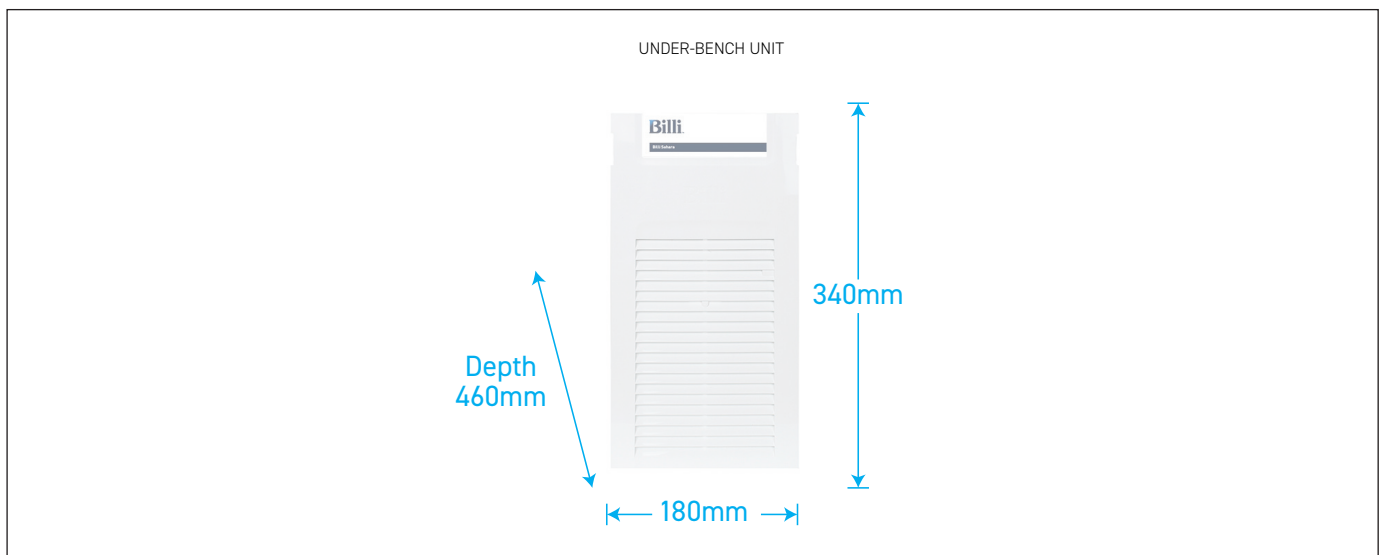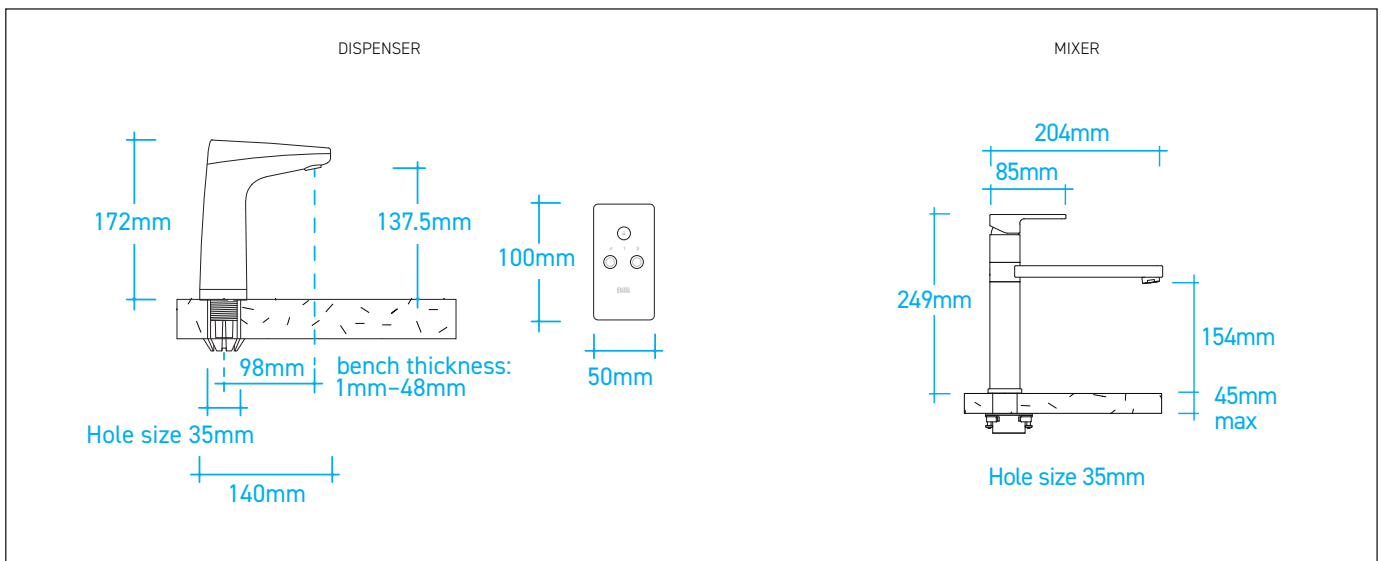

INSTALLATION REQUIREMENTS

PREFERRED INSTALLATION LAYOUT

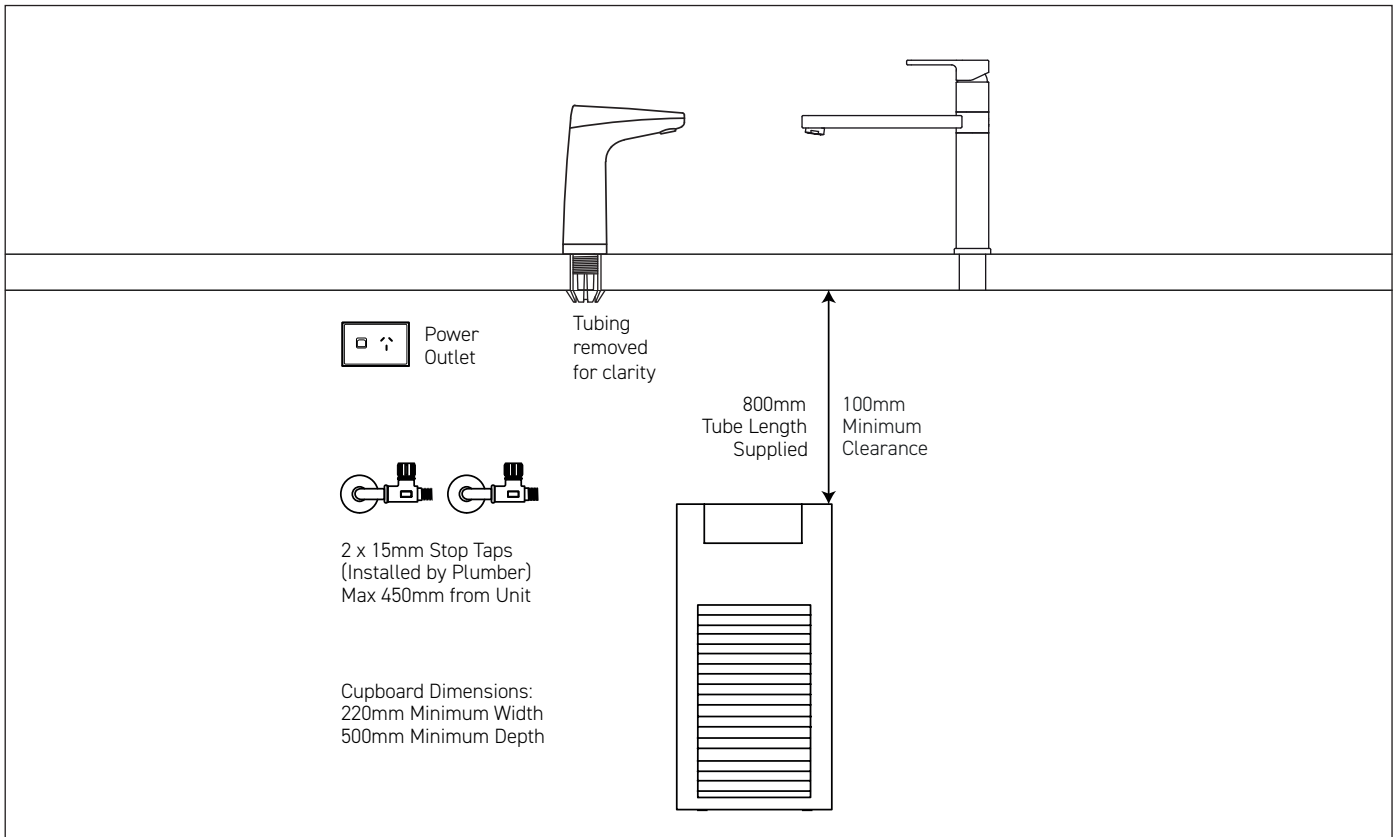

WATER SUPPLY

Two (2) 1/2" BSP (15mm) stop-taps with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

POWER SUPPLY

A standard 15 amp power outlet is required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021525; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; Section J6.6 of the BCA; HACCP: PE-872-WAT-1-02; AS1428 DDA Compliant; WELL Cornerstone Member; WELS 6 star rating registration T40034.

WARRANTY

The Billi Sahara Plus Range is covered by a comprehensive 2 year warranty on all parts and labour.

Billi™



NOMORE BOTTLES™
Drinking Water Filtration Systems

Exclusive UAE distributors

Warehouse 2, Street 3,
Area 398, Dar Investments,
Green Community West,
Dubai Investment Park 1 Dubai,
United Arab Emirates

P +971 (0)42 529 030
F info@nomorebottles.ae
W www.billi.ae

visit us at    

Designed and manufactured in  Australia to the highest quality standards