

Billi Eco Sparkling with XT Motion Dispenser

The Eco Sparkling is a premium drinking water solution that delivers instant boiling, chilled, and sparkling filtered water from a single appliance. Featuring underbench ice bank technology, it offers increased capacity and faster recovery, ensuring consistent performance even in high-demand settings. Designed with efficiency and convenience in mind, the Eco Sparkling combines advanced functionality with modern style.

The XT Motion dispenser delivers boiling, chilled, and sparkling filtered water through an integrated dual-control interface that supports both touch and touch-free activation. The system allows users to dispense water with precision and safety using motion control, while enhancing hygiene and usability in high-use environments.



BOILING



CHILLED



SPARKLING



Up to 10

Features



ENERGY
EFFICIENT



ICE BANK
TECHNOLOGY



ADJUSTABLE
CHILLED
TEMPERATURE



ADJUSTABLE
SPARKLING
LEVEL



SAFE TO
OPERATE



ITALO-AUSTRALIAN
PARTNERSHIP

Australian design & made Boiling unit ^ Italian design & made Sparkling unit

XT Motion
Dispenser

Eco Sparkling
Under-Bench Units



Finishes

Standard Finishes



CH -
Chrome



BR -
Brushed



MB -
Matte Black

Add the relevant Finish Code to the Product code to complete your specification eg 906000MCH-LF

Accessories


990720 - Tubing Extension Kit for X series dual temp dispensers 2mtrs

Product Specifications

Water Type	BCS
Dispenser	M - XT Motion Dispenser
Mixer Tapware	N/A
Product Code	906000M
Warranty	3 years manufacturers warranty
Under-Bench Dimensions (Boiling)	180mm(W) x 340mm (H) x 365mm (D)
Under-Bench Dimensions (Cold)	255mm(W) x 410mm (H) x 420mm (D)
Boiling Output	Up to 90 cups per hour
Chilled* Output	Up to 100 cups per hour
Sparkling* Output	Up to 100 cups per hour
50°C Hot Water Output	N/A
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	2 x 10 amp
Power Rating	1500W, 220-240V ~ 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021525
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	N/A
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OHS (OHS 801469).
Food Handling	HACCP - PE-138-BIL-R1-02
Filtration	994051 - 5.0 Micron supplied standard


Scan the QR code access
our Revit families on

bimstore



Technical Drawings

DISPENSER

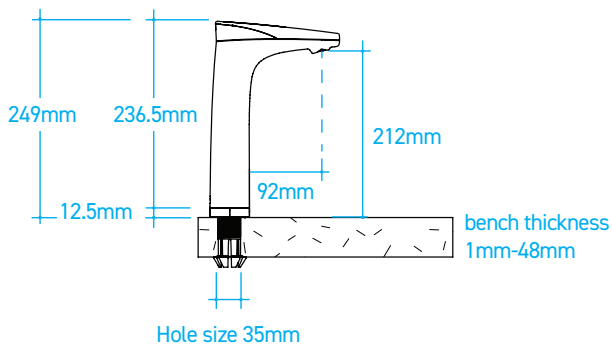


UNDER-BENCH UNITS



Installation Requirements

Please refer to Vent Kit Installation Guide - Ref. No. 611002-02

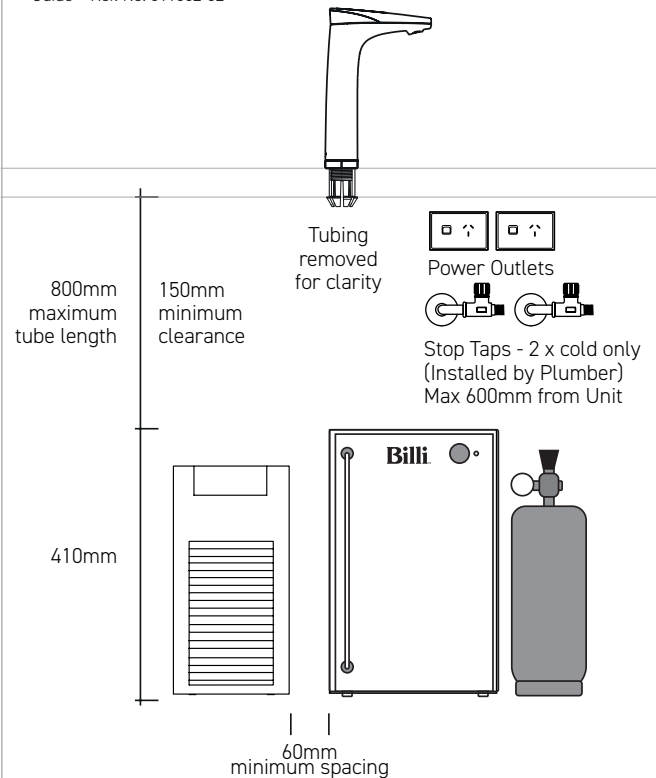

Installation Notes

Electrical

Two (2) standard 10 amp power outlets are required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

Water

Two (2) Cold 1/2" BSP (15mm) stop-taps with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

Pressure Valve

Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.

CO2 MSDS

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

Stone Benches

Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.

Ventilation

This is an air cooled product, ventilation is vital under normal operating conditions. Failure to follow manufacturers ventilation recommendations can risk warranty.

Filtration - Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994051 - (5.0 micron)


Supplied standard.
Commercial & high volume sites.



994052 - (0.2 micron)

Fine filtration.
Residential or Critical Care sites.

*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi