


Installation steps:

1. Fill the soap bottle with liquid soap for the first use.
2. Press and hold button until liquid soap is dispensed from the nozzle.
3. Place hand below the nozzle to dispense liquid soap into palm of hand.

The soap dispensers have 4 settings to adjust dispense of soap, the first gear being the least volume and the fourth being maximum. Factory default is set at second gear.

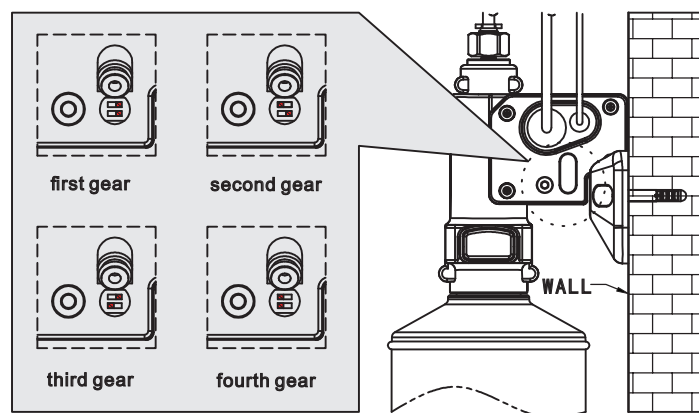


CARE AND MAINTENANCE

If the soap dispenser fails to function correctly, firstly check all connections are tight and free from air leaks. If dispenser still fails to function, place manifold into a bottle of warm water. Pump the warm water through the dispenser to dislodge any dried soap residue and then refit manifold into soap bottle.

Water marks and soap residue on polished chrome surfaces are best cleaned using warm water and a mild detergent. Use a stainless steel cleaner for brushed stainless steel soap dispensers. Never use an abrasive cloth to remove stubborn stains. Dry with a soft clean cloth.

Automatic soap dispenser

INSTRUCTION




Thank you for choosing our products.

Please read this manual carefully before use.

Specifications:

Model No.	GZ15A
Power supply	DC: 4 AA alkaline batteries(LR6×4) AC: 100V~240V; 50/60Hz
Viscosity	100-3500 cP (mPa.s)
Bottle capacity	0.8L
Soap time	0.2~0.8 (adjustable)
Sensing distance	9cm±10%
Power consumption	AC: Standby mode≤2W; Work mode≤4W DC: Standby mode≤0.2mW

Installation:

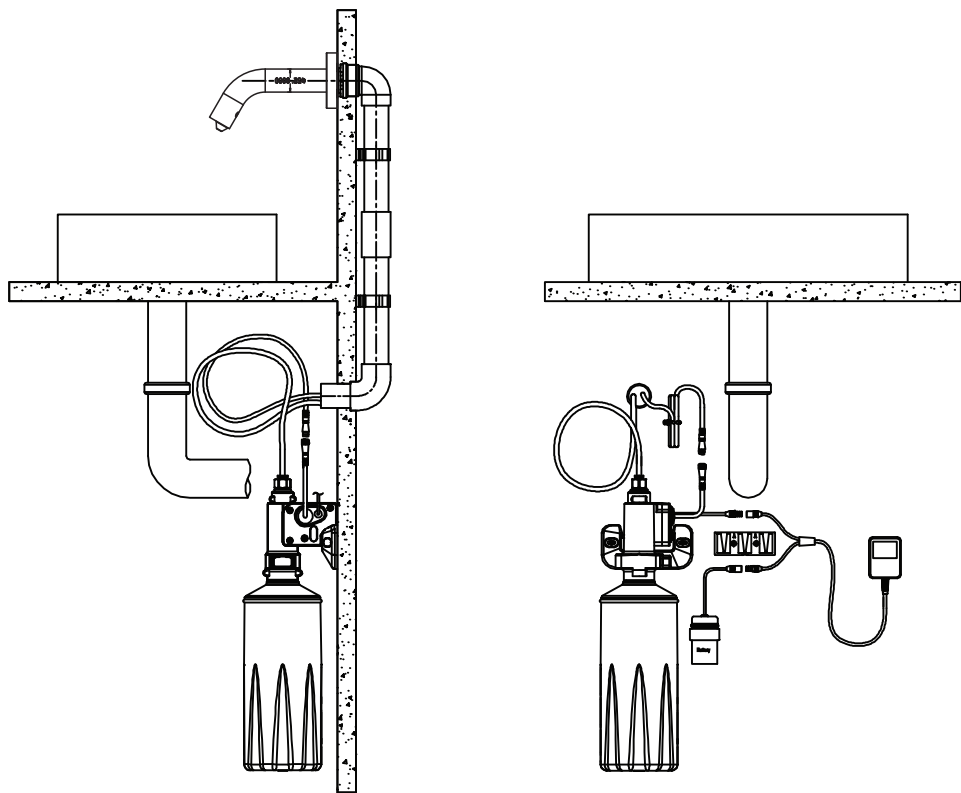

Roughing in:

